


# MasterCool Refrigeration Side-by-Side Merging Combinations For Vi Models



# Side-by-Side Merging Kit

## KSK 1002

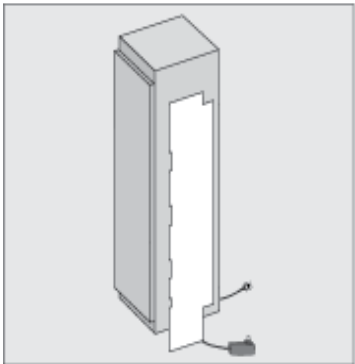

SPECIFICATIONS	
KSK 1002 — Item 38996010USA	
Electrical	
Electrical Requirements - Volts/Amps	110V / 120V, 60Hz, 15 Amps In a side-by-side installations, a separate outlet must be used for each appliance.
Power Cord - Plug and length	NEMA 1-15 plug, 9' 3" ft (2.8 m)
Support	
Call Miele	800.843.7231
Miele Website	<a href="http://www.mieleusa.com">www.mieleusa.com</a>
20/20 Link	<a href="http://2020technologies.com">2020technologies.com</a>

This merging kit should be used for side-by-side installation of the following models:


- K 18x1 Vi, K 19x1 Vi, K 18x3 Vi, K 19x3 Vi
- F 14x1 Vi, F 18x1 Vi, F 19x1 Vi, F 14x3 Vi, F 18x3 Vi, F 19x3 Vi
- KF 18x1 Vi, KF 19x1, Vi, KF 18x3 Vi, KF 19x3 Vi
- KWT 16x1 Vi, KWT 16x3 Vi

# Side-by-Side Merging Kit KSK 1002



## Side-by-side

### ... without partition

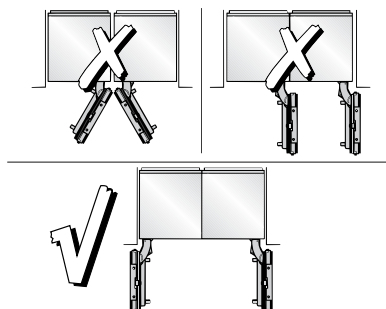


If the appliances are installed directly next to each other (without a partition), they need to be attached together. A heating mat must also be installed. This will help avoid condensation and prevent damages.


### ... with partition

The minimum thickness of the partition is  $\frac{5}{8}$ " (16 mm).


If there is a partition with a thickness **from  $\frac{5}{8}$ " (16 mm) to  $6\frac{5}{16}$ " (160 mm)** between the adjacent appliances, then each appliance should be individually installed within its own niche using the mounting accessories included.

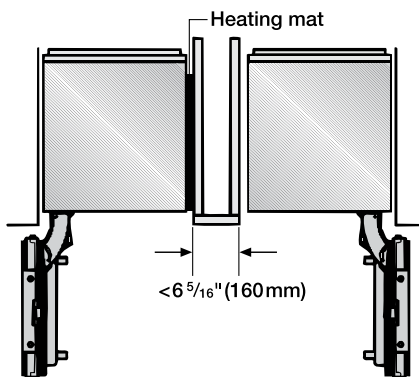

In this case, you will only need the heating mat from the "Merging Kit" to avoid condensation and prevent damages.

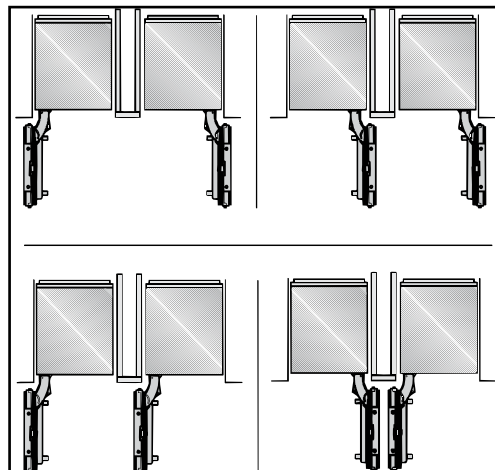

## TRANSFORMER PLUG DETAILS

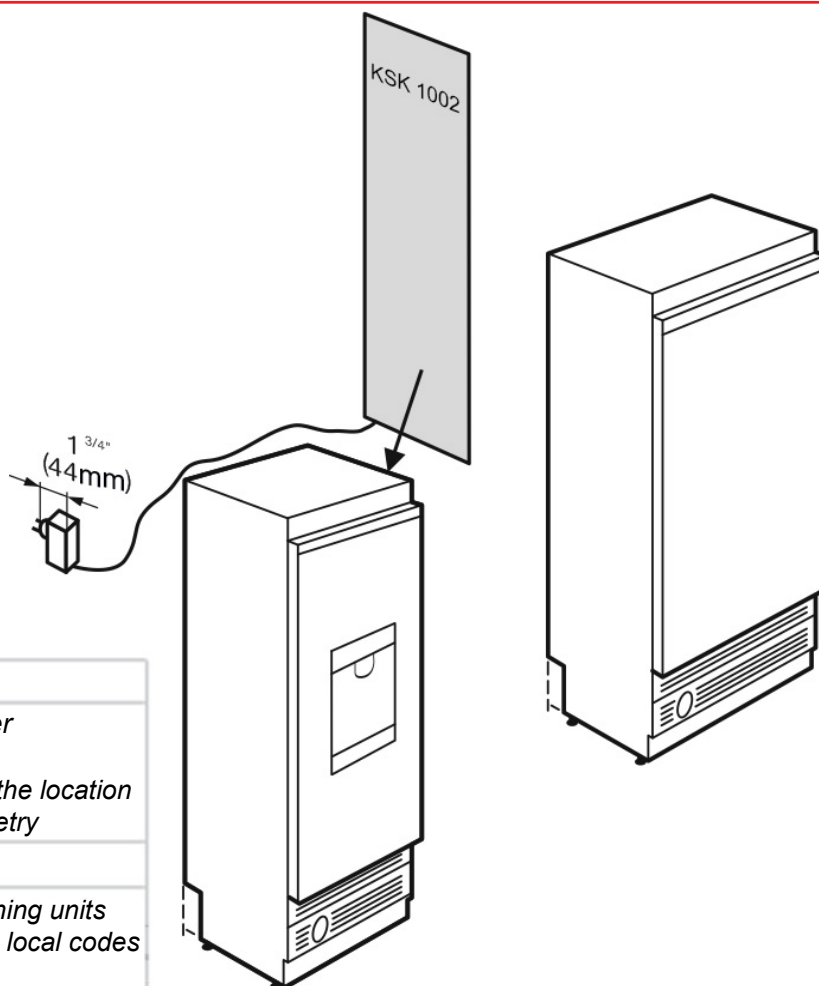

### Location Codes

9 foot- 120Volt- 15Amp 2-wire molded plug power supply

Note: Niche depth under 25" (635 mm) will require the location of the Electrical outlet(s) to be in adjacent cabinetry

### Notes

- KSK1002 Merging kit must be used when combining units
- All Installations must be done in accordance with local codes




# Product and Cut-out Dimensions

## 42" Side-by-Side Combination

### F14X3 Vi & KWT1603 Vi



FOR FLUSH INSTALLATION

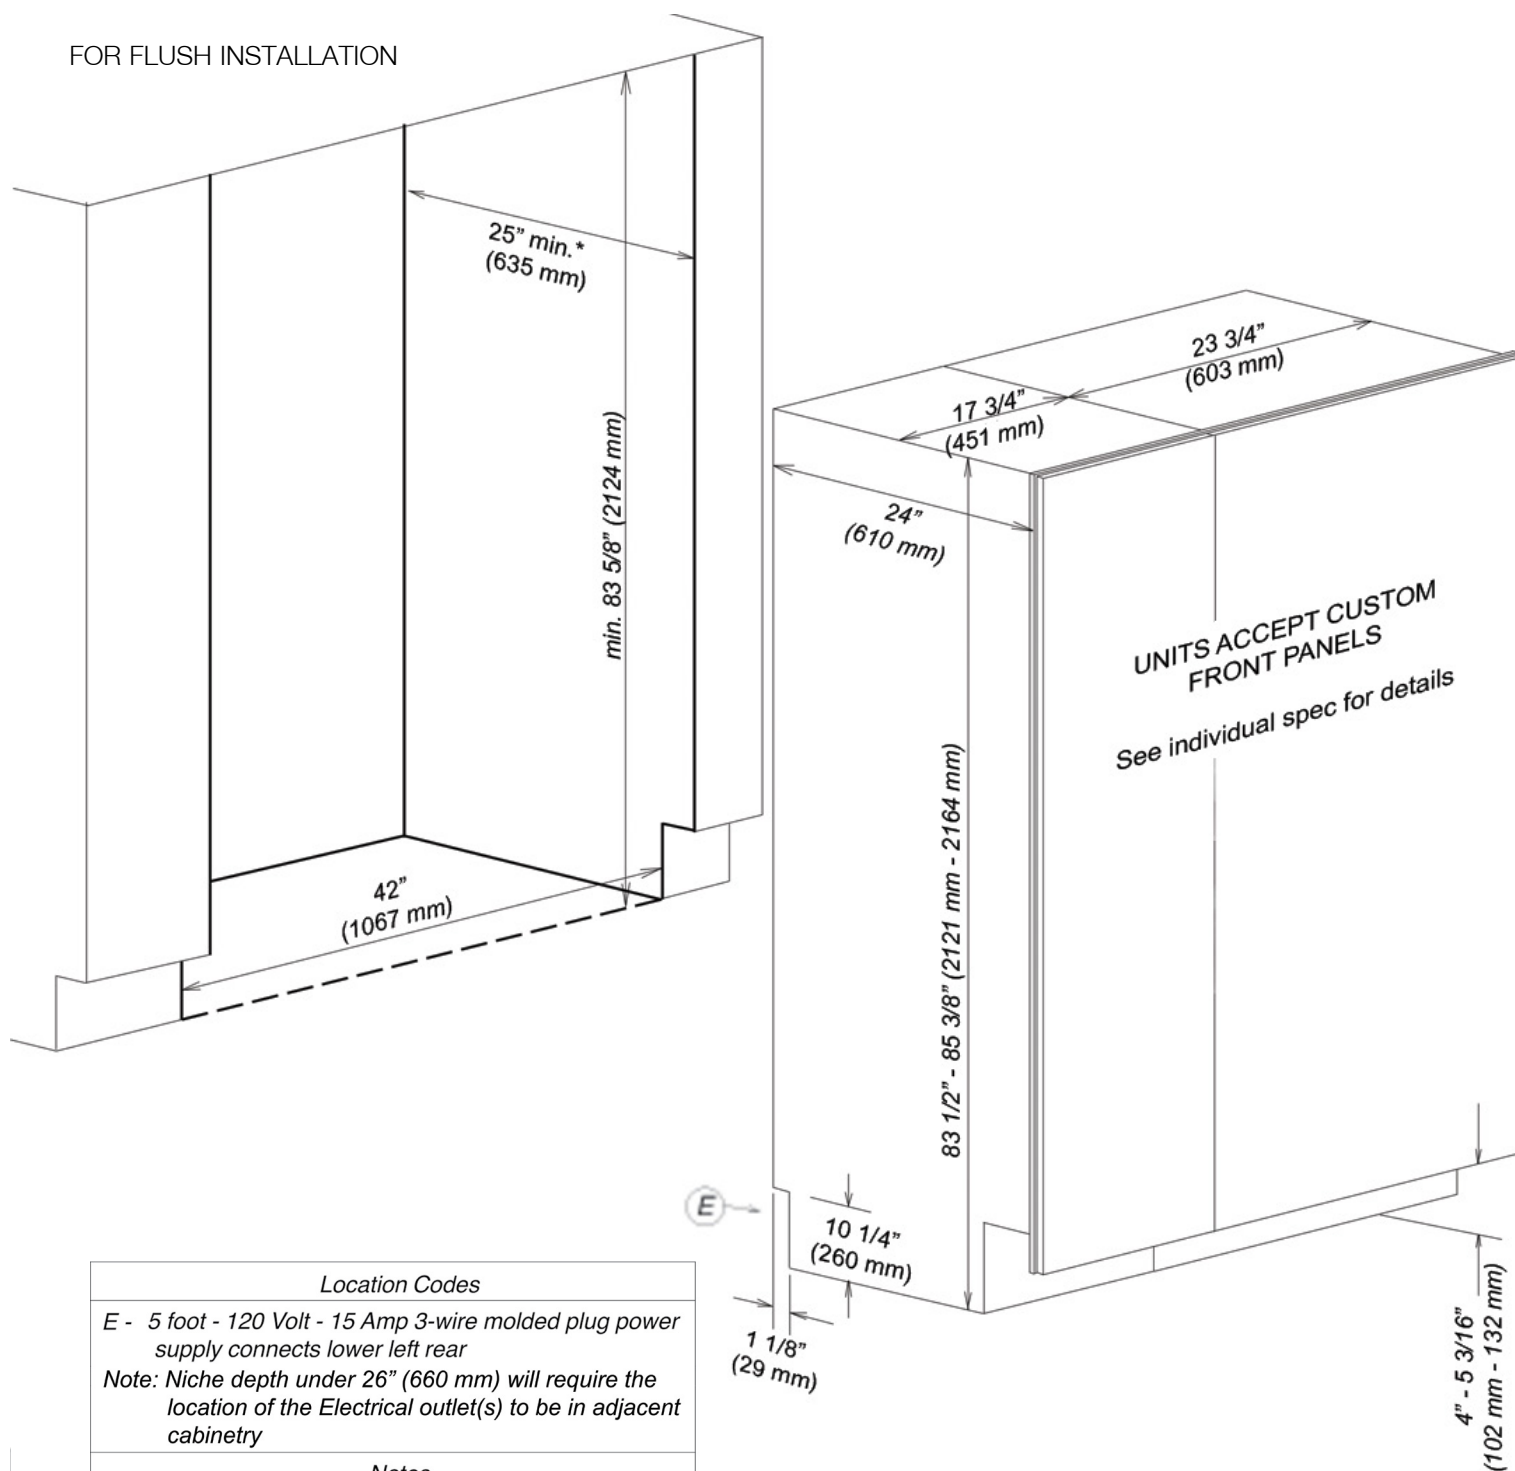

#### Location Codes

*E* - 5 foot - 120 Volt - 15 Amp 3-wire molded plug power supply connects lower left rear

*Note:* Niche depth under 26" (660 mm) will require the location of the Electrical outlet(s) to be in adjacent cabinetry

#### Notes

- KSK1002 Merging kit must be used when combining units
- All Installations must be done in accordance with local codes
- Sides of adjoining cabinets should be filled (flush to frame) to insure proper fit and finish
- For Proud Installation — please adjust accordingly

\*Depth assumes a 3/4" panel, please adjust according to custom panel thickness


# Product and Cut-out Dimensions

## 48" Side-by-Side Combination

### F14X3 Vi & K18X3 Vi



FOR FLUSH INSTALLATION

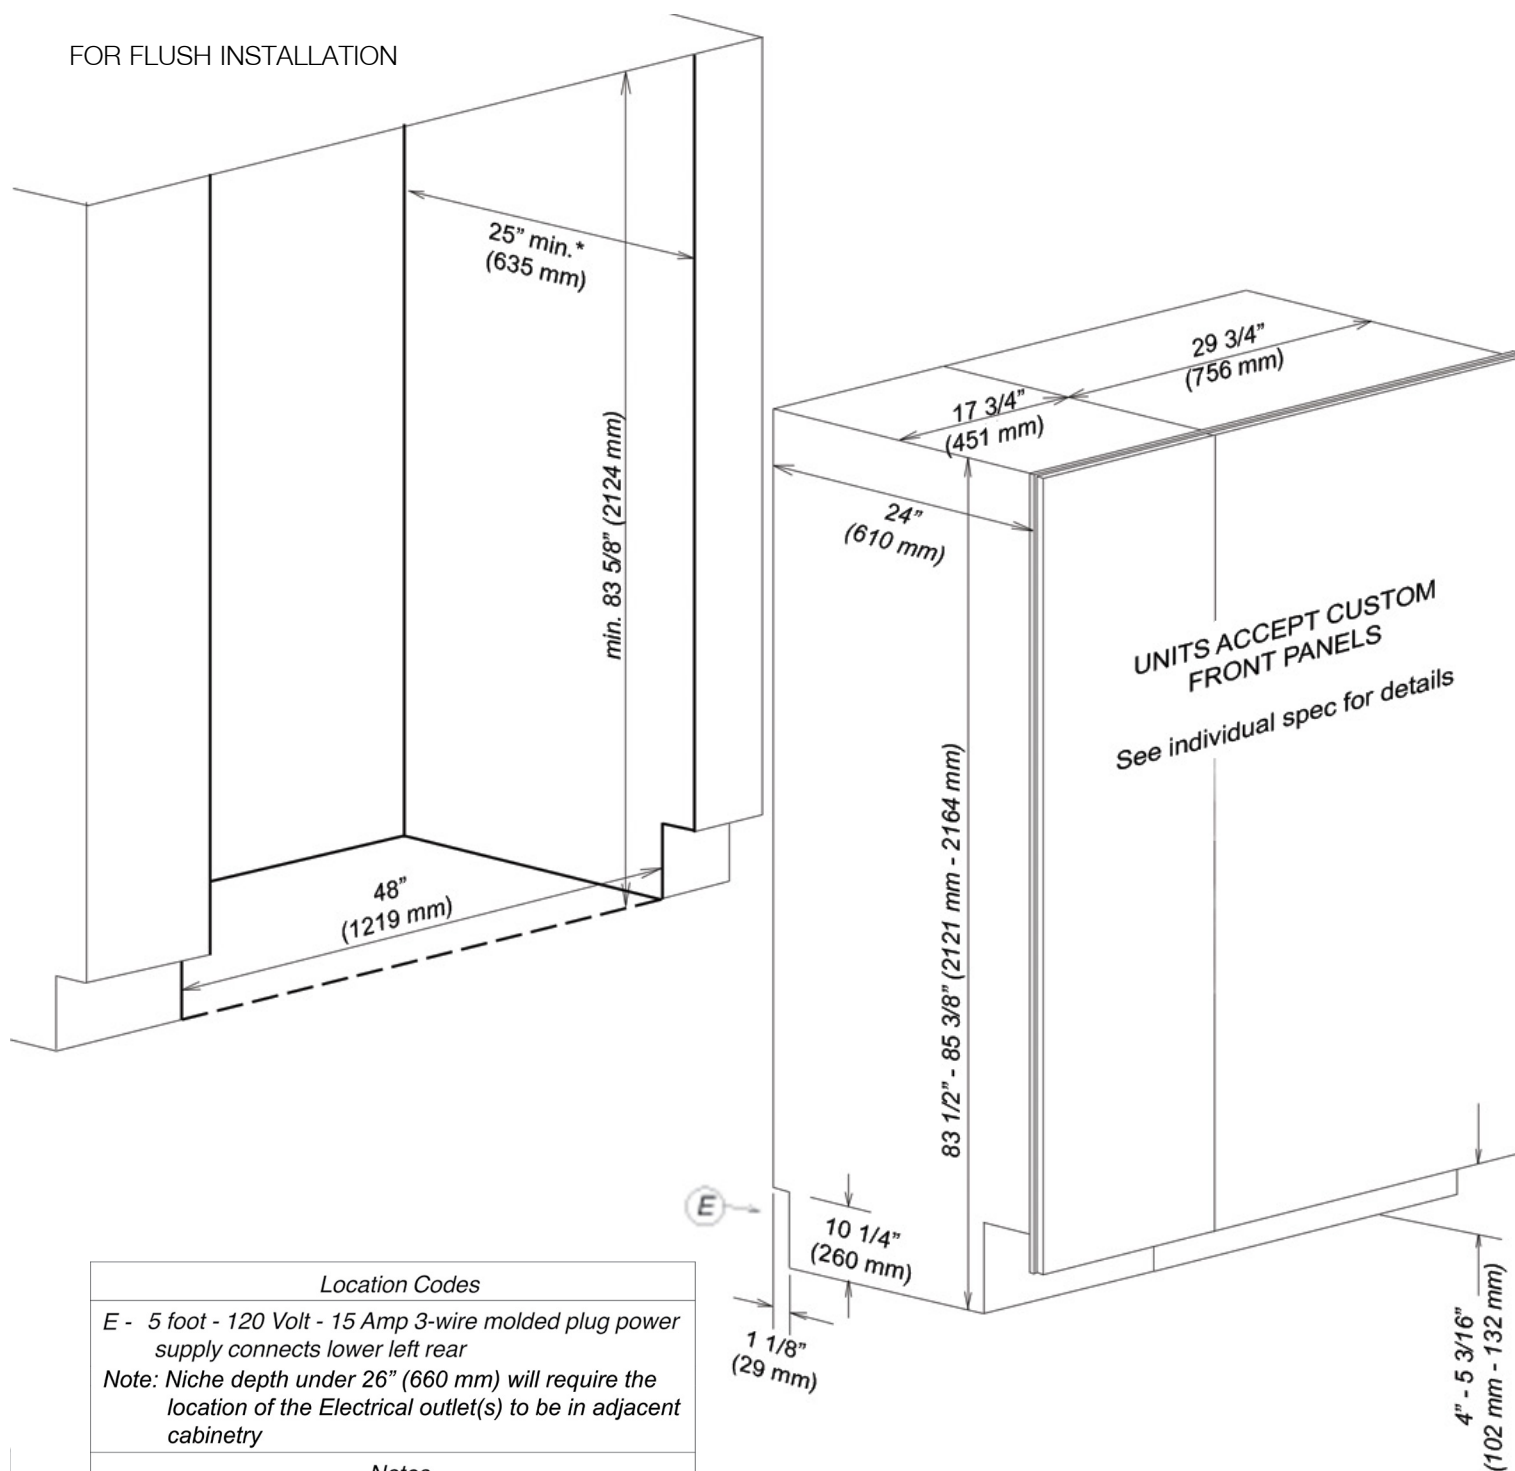

#### Location Codes

*E* - 5 foot - 120 Volt - 15 Amp 3-wire molded plug power supply connects lower left rear

*Note: Niche depth under 26" (660 mm) will require the location of the Electrical outlet(s) to be in adjacent cabinetry*

#### Notes

- KSK1002 Merging kit must be used when combining units
- All Installations must be done in accordance with local codes
- Sides of adjoining cabinets should be filled (flush to frame) to insure proper fit and finish
- For Proud Installation — please adjust accordingly

*\*Depth assumes a 3/4" panel, please adjust according to custom panel thickness*


# Product and Cut-out Dimensions

## 48" Side-by-Side Combination

### KWT16x3 Vi & KWT16x3 Vi



FOR FLUSH INSTALLATION

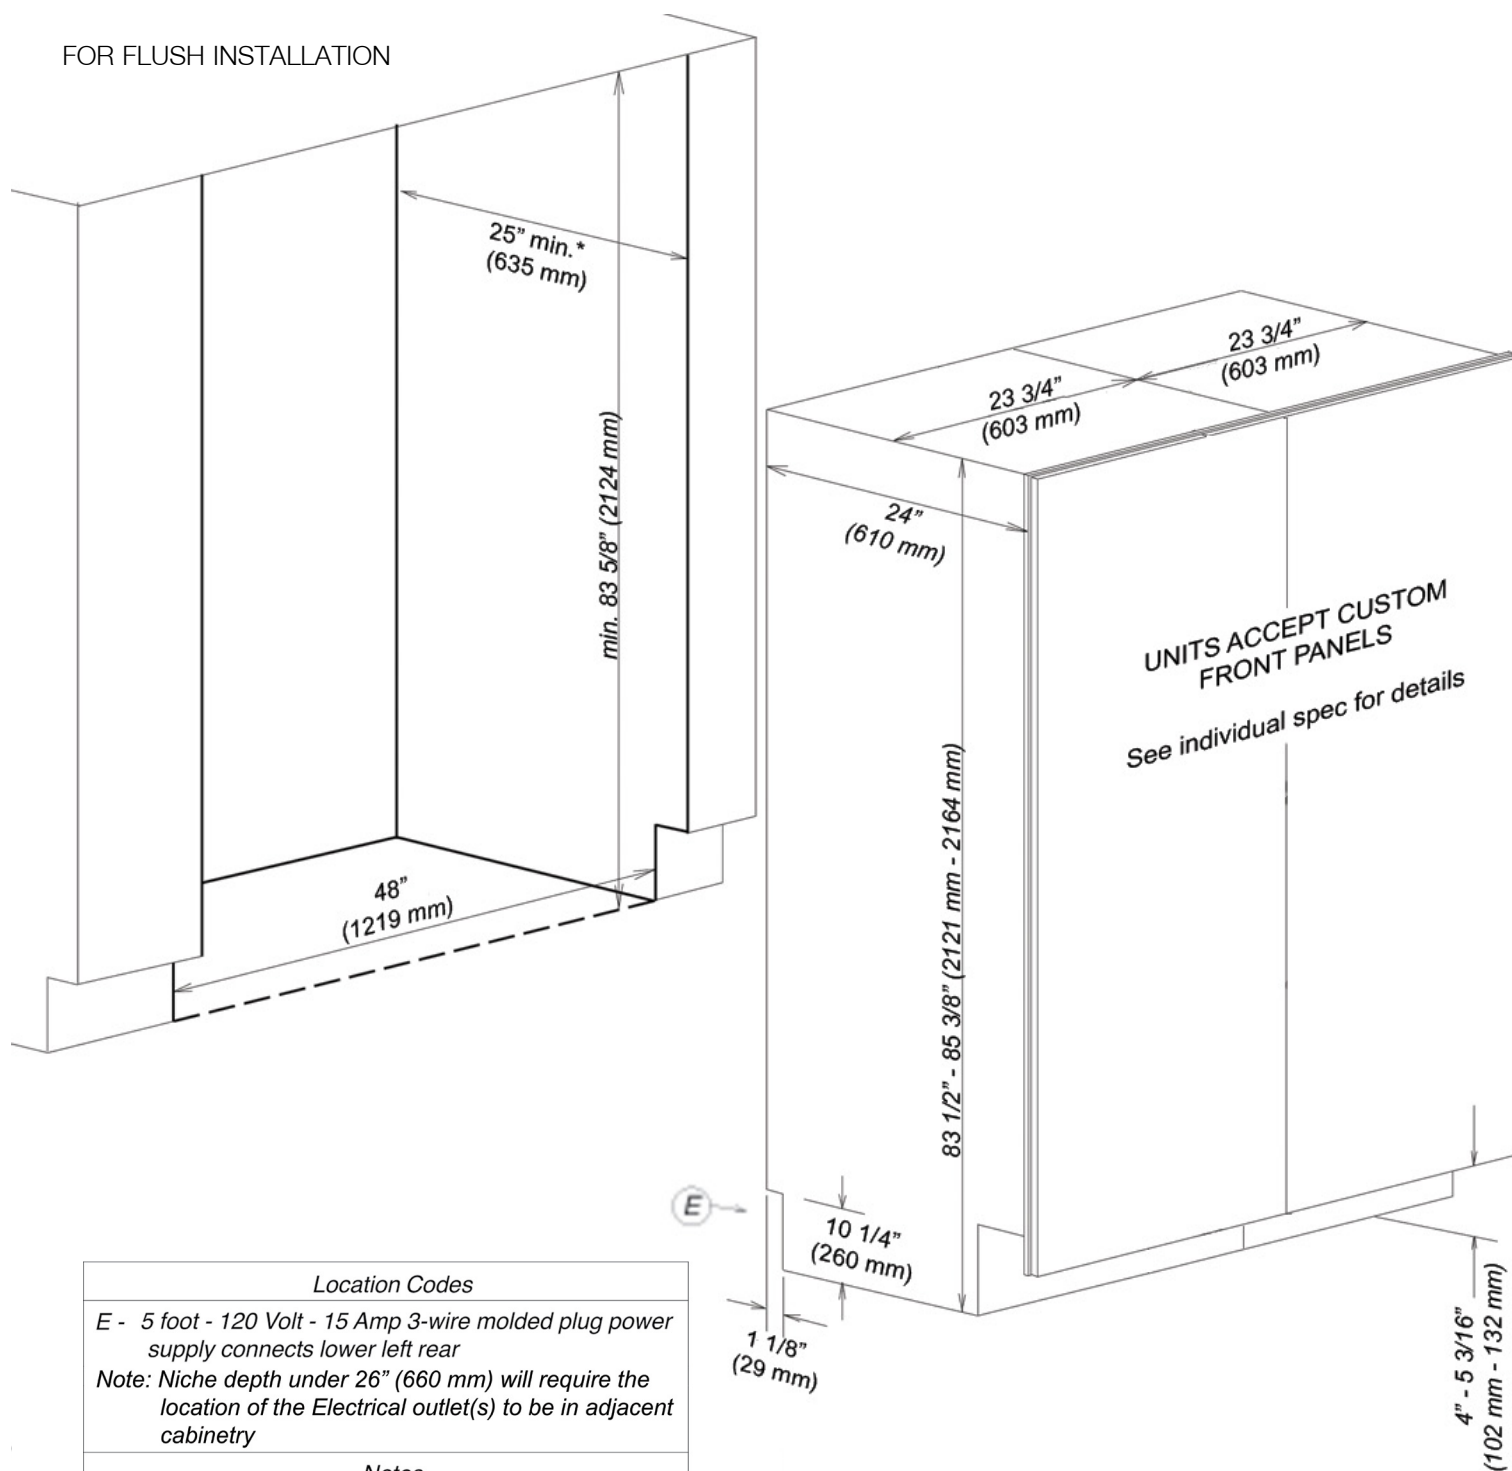

#### Location Codes

E - 5 foot - 120 Volt - 15 Amp 3-wire molded plug power supply connects lower left rear

Note: Niche depth under 26" (660 mm) will require the location of the Electrical outlet(s) to be in adjacent cabinetry

#### Notes

- KSK1002 Merging kit must be used when combining units
- All Installations must be done in accordance with local codes
- Sides of adjoining cabinets should be filled (flush to frame) to insure proper fit and finish
- For Proud Installation — please adjust accordingly

\*Depth assumes a 3/4" panel, please adjust according to custom panel thickness


# Product and Cut-out Dimensions

## 54" Side-by-Side Combination

### F14X3 Vi & K19X3 Vi



FOR FLUSH INSTALLATION

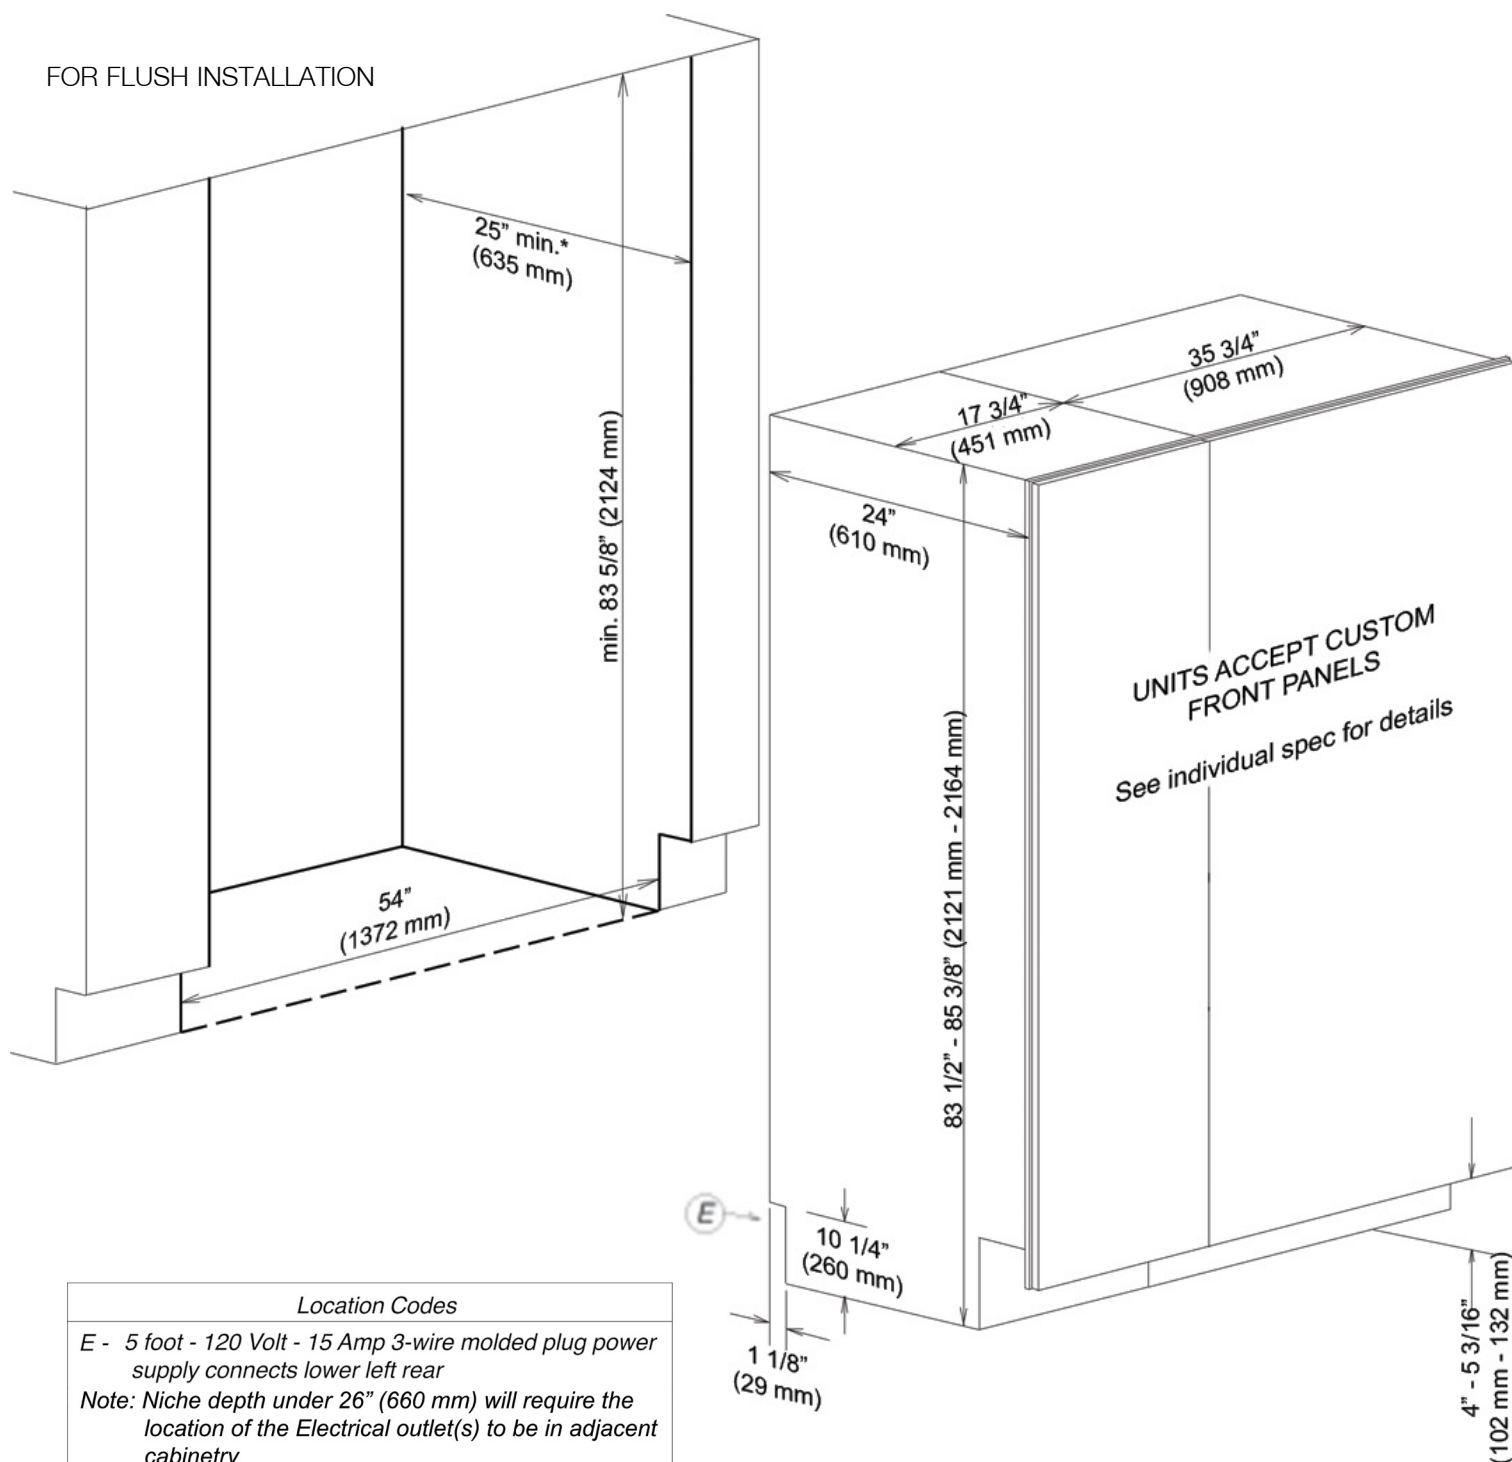

#### Location Codes

*E* - 5 foot - 120 Volt - 15 Amp 3-wire molded plug power supply connects lower left rear

*Note:* Niche depth under 26" (660 mm) will require the location of the Electrical outlet(s) to be in adjacent cabinetry

#### Notes

- KSK1002 Merging kit must be used when combining units
- All Installations must be done in accordance with local codes
- Sides of adjoining cabinets should be filled (flush to frame) to insure proper fit and finish
- For Proud Installation — please adjust accordingly

\*Depth assumes a 3/4" panel, please adjust according to custom panel thickness


# Product and Cut-out Dimensions

## 54" Side-by-Side Combination

### KWT16X3 Vi & K18X3/F18x3/KF18x3 Vi



FOR FLUSH INSTALLATION

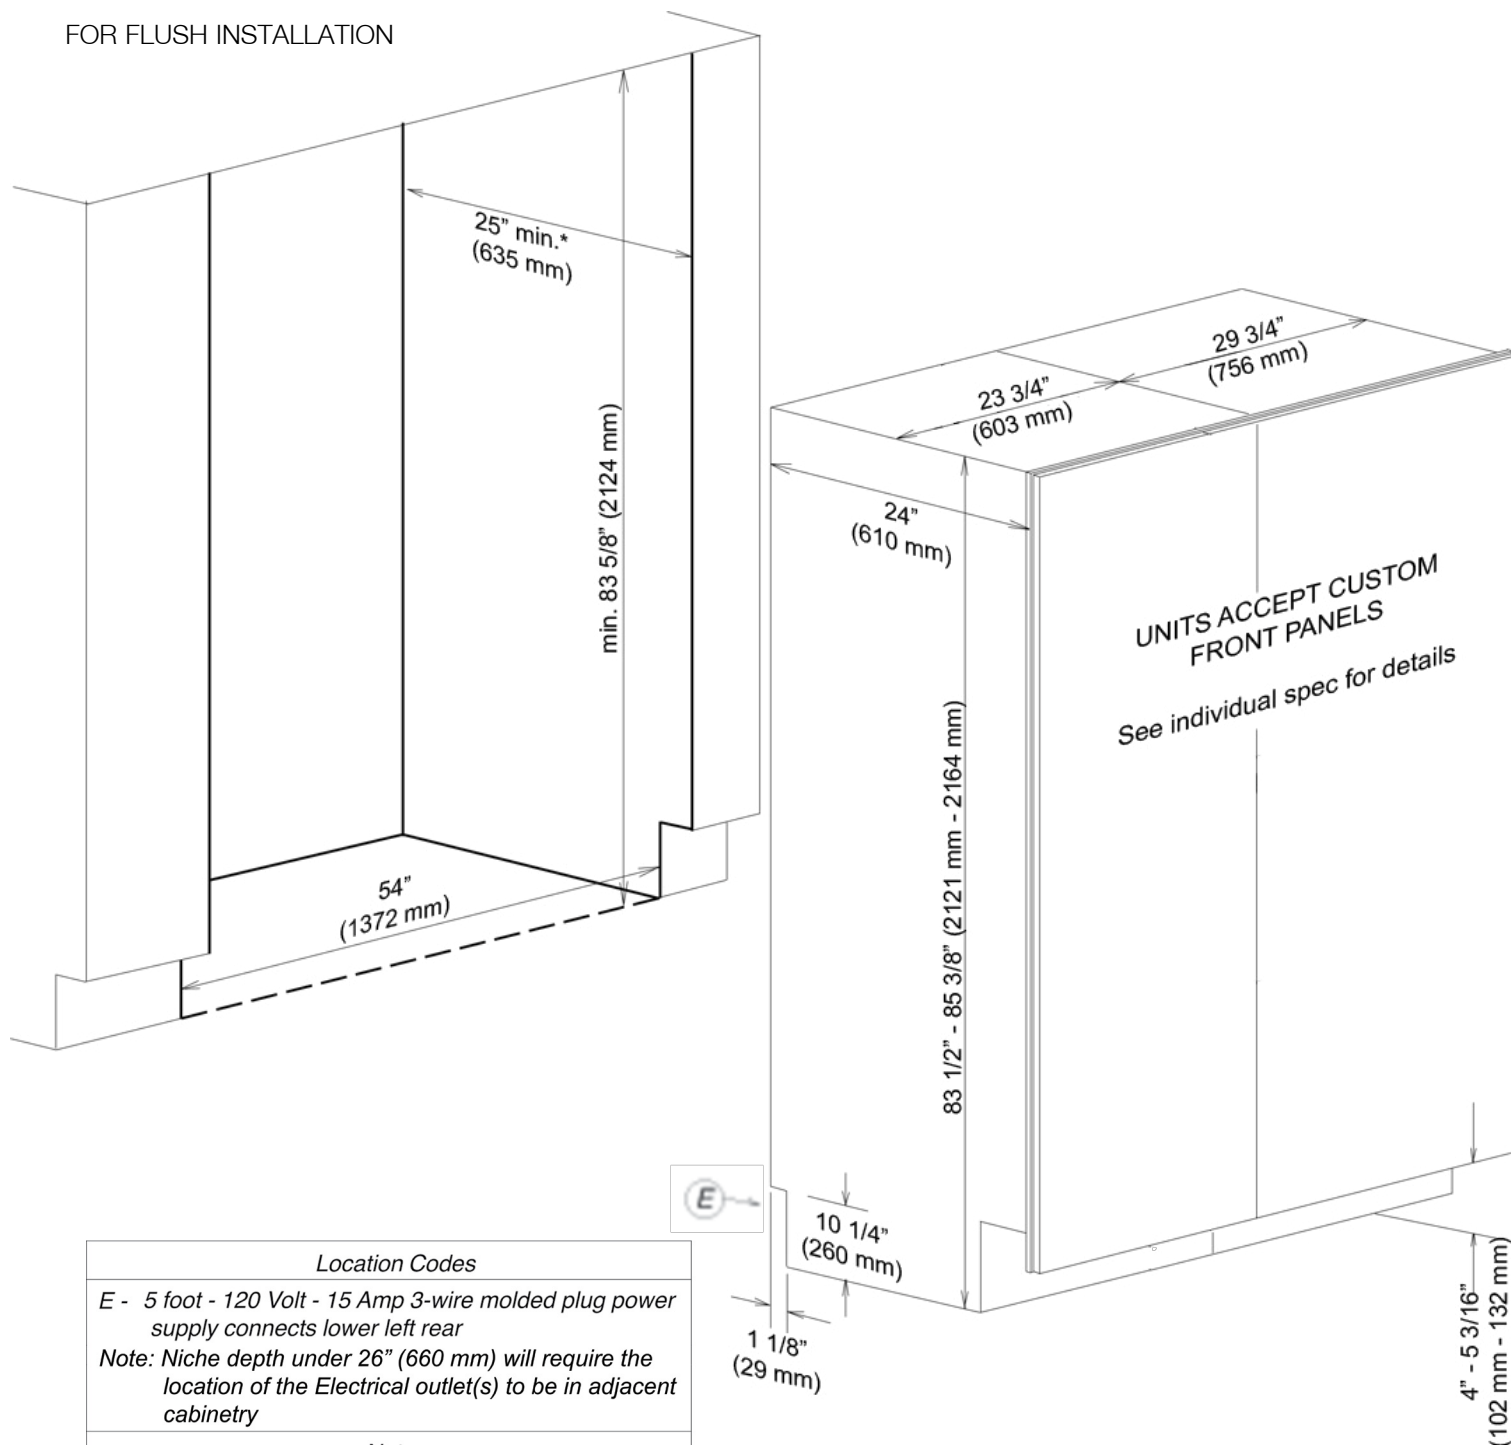

#### Location Codes

*E* - 5 foot - 120 Volt - 15 Amp 3-wire molded plug power supply connects lower left rear

*Note:* Niche depth under 26" (660 mm) will require the location of the Electrical outlet(s) to be in adjacent cabinetry

#### Notes

- KSK1002 Merging kit must be used when combining units
- All Installations must be done in accordance with local codes
- Sides of adjoining cabinets should be filled (flush to frame) to insure proper fit and finish
- For Proud Installation — please adjust accordingly

\*Depth assumes a 3/4" panel, please adjust according to custom panel thickness




# Product and Cut-out Dimensions

## 60" Side-by-Side Combination

### F18X3 Vi & K18X3 Vi



FOR FLUSH INSTALLATION

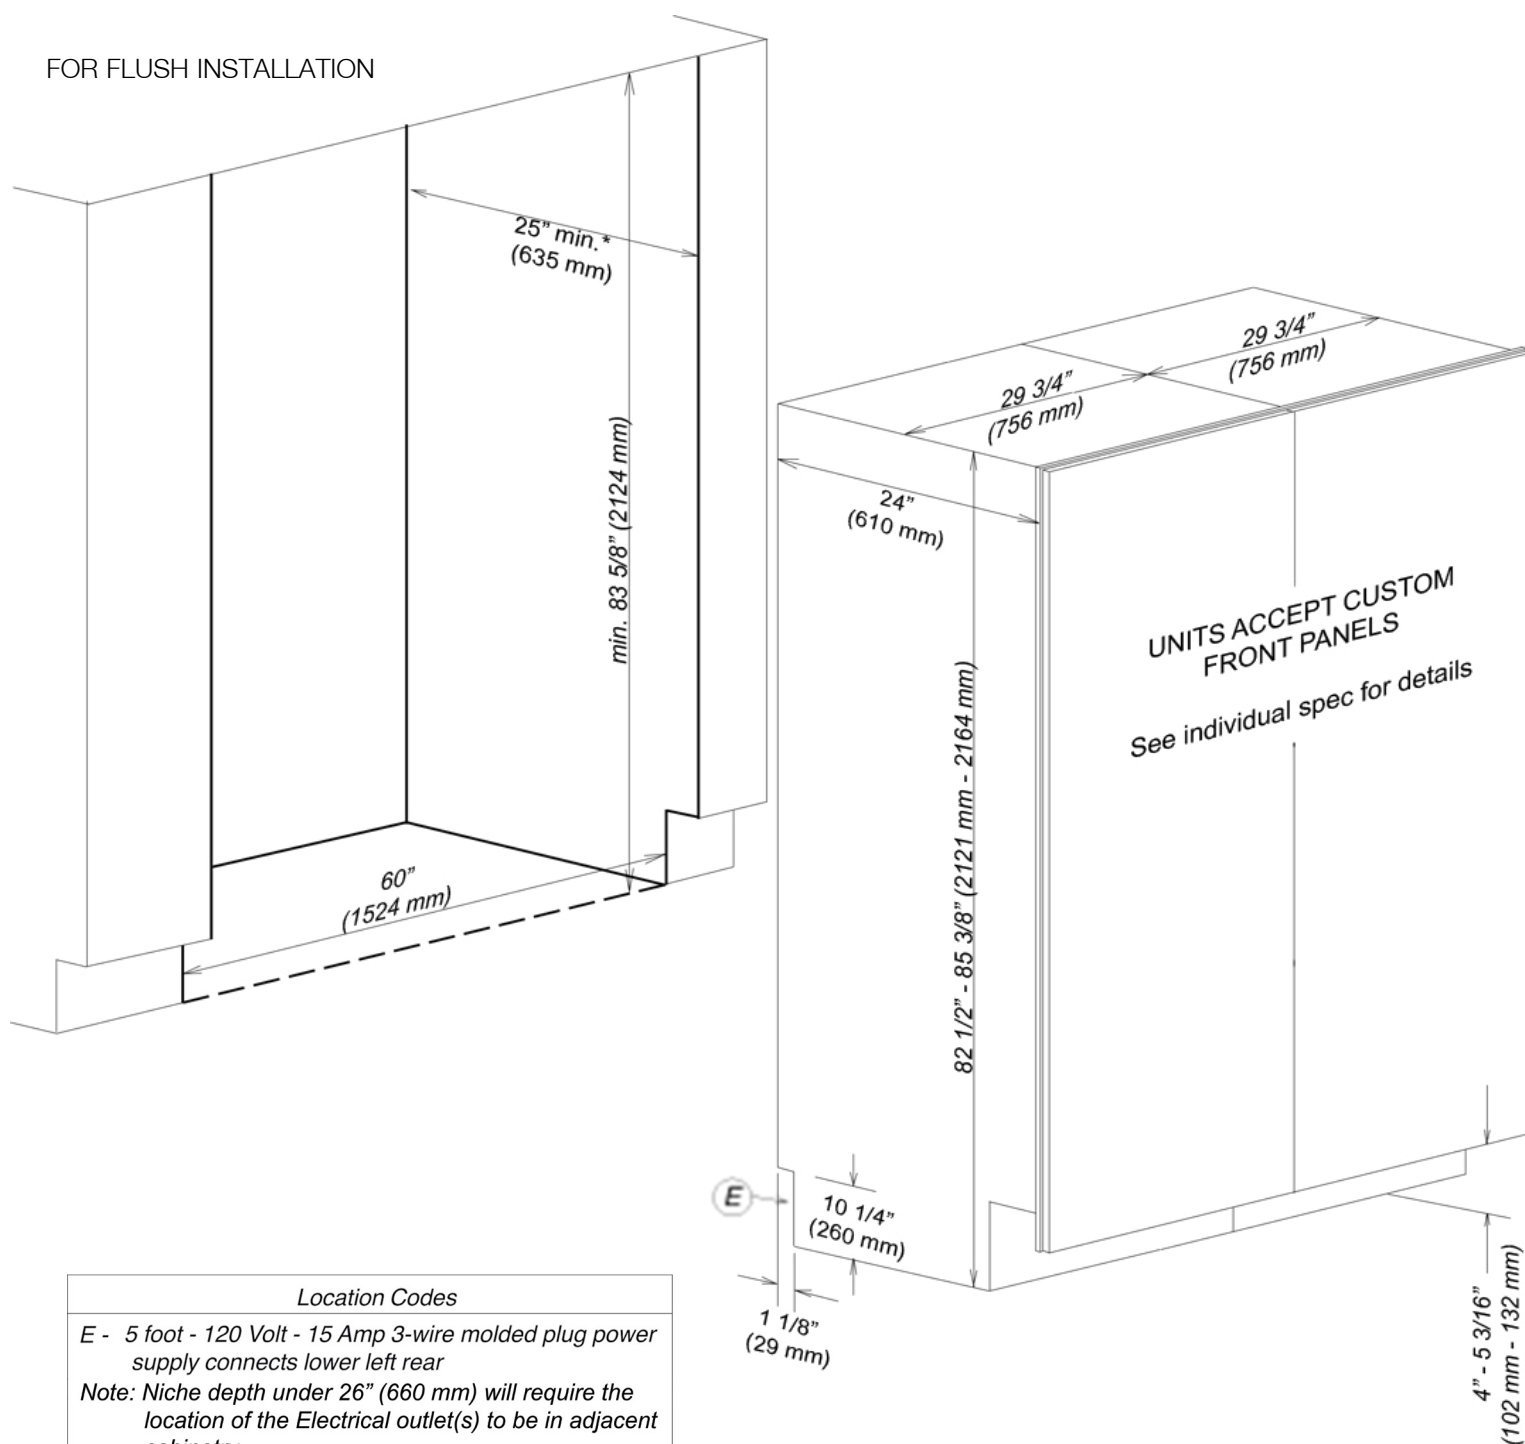

#### Location Codes

E - 5 foot - 120 Volt - 15 Amp 3-wire molded plug power supply connects lower left rear

Note: Niche depth under 26" (660 mm) will require the location of the Electrical outlet(s) to be in adjacent cabinetry

#### Notes

- KSK1002 Merging kit must be used when combining units
- All Installations must be done in accordance with local codes
- Sides of adjoining cabinets should be filled (flush to frame) to insure proper fit and finish
- For Proud Installation — please adjust accordingly

\*Depth assumes a 3/4" panel, please adjust according to custom panel thickness


**Miele**

FOR FLUSH INSTALLATION

25" min.\*  
(635 mm)

min. 83 5/8" (2124 mm)

60"  
(1524 mm)

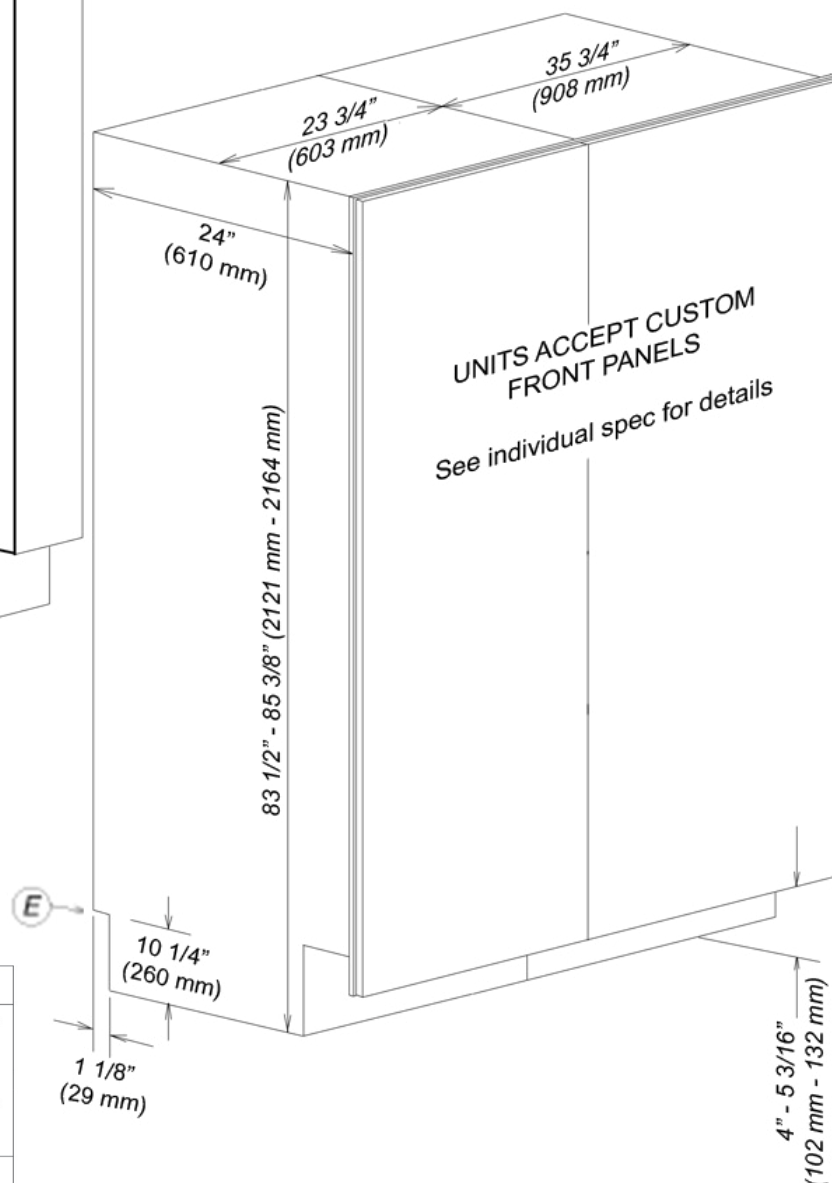


*\*Depth assumes a 3/4" panel, please adjust according to custom panel thickness*

# Product and Cut-out Dimensions

## 66" Side-by-Side Combination

### F18X3 Vi & K19X3 Vi

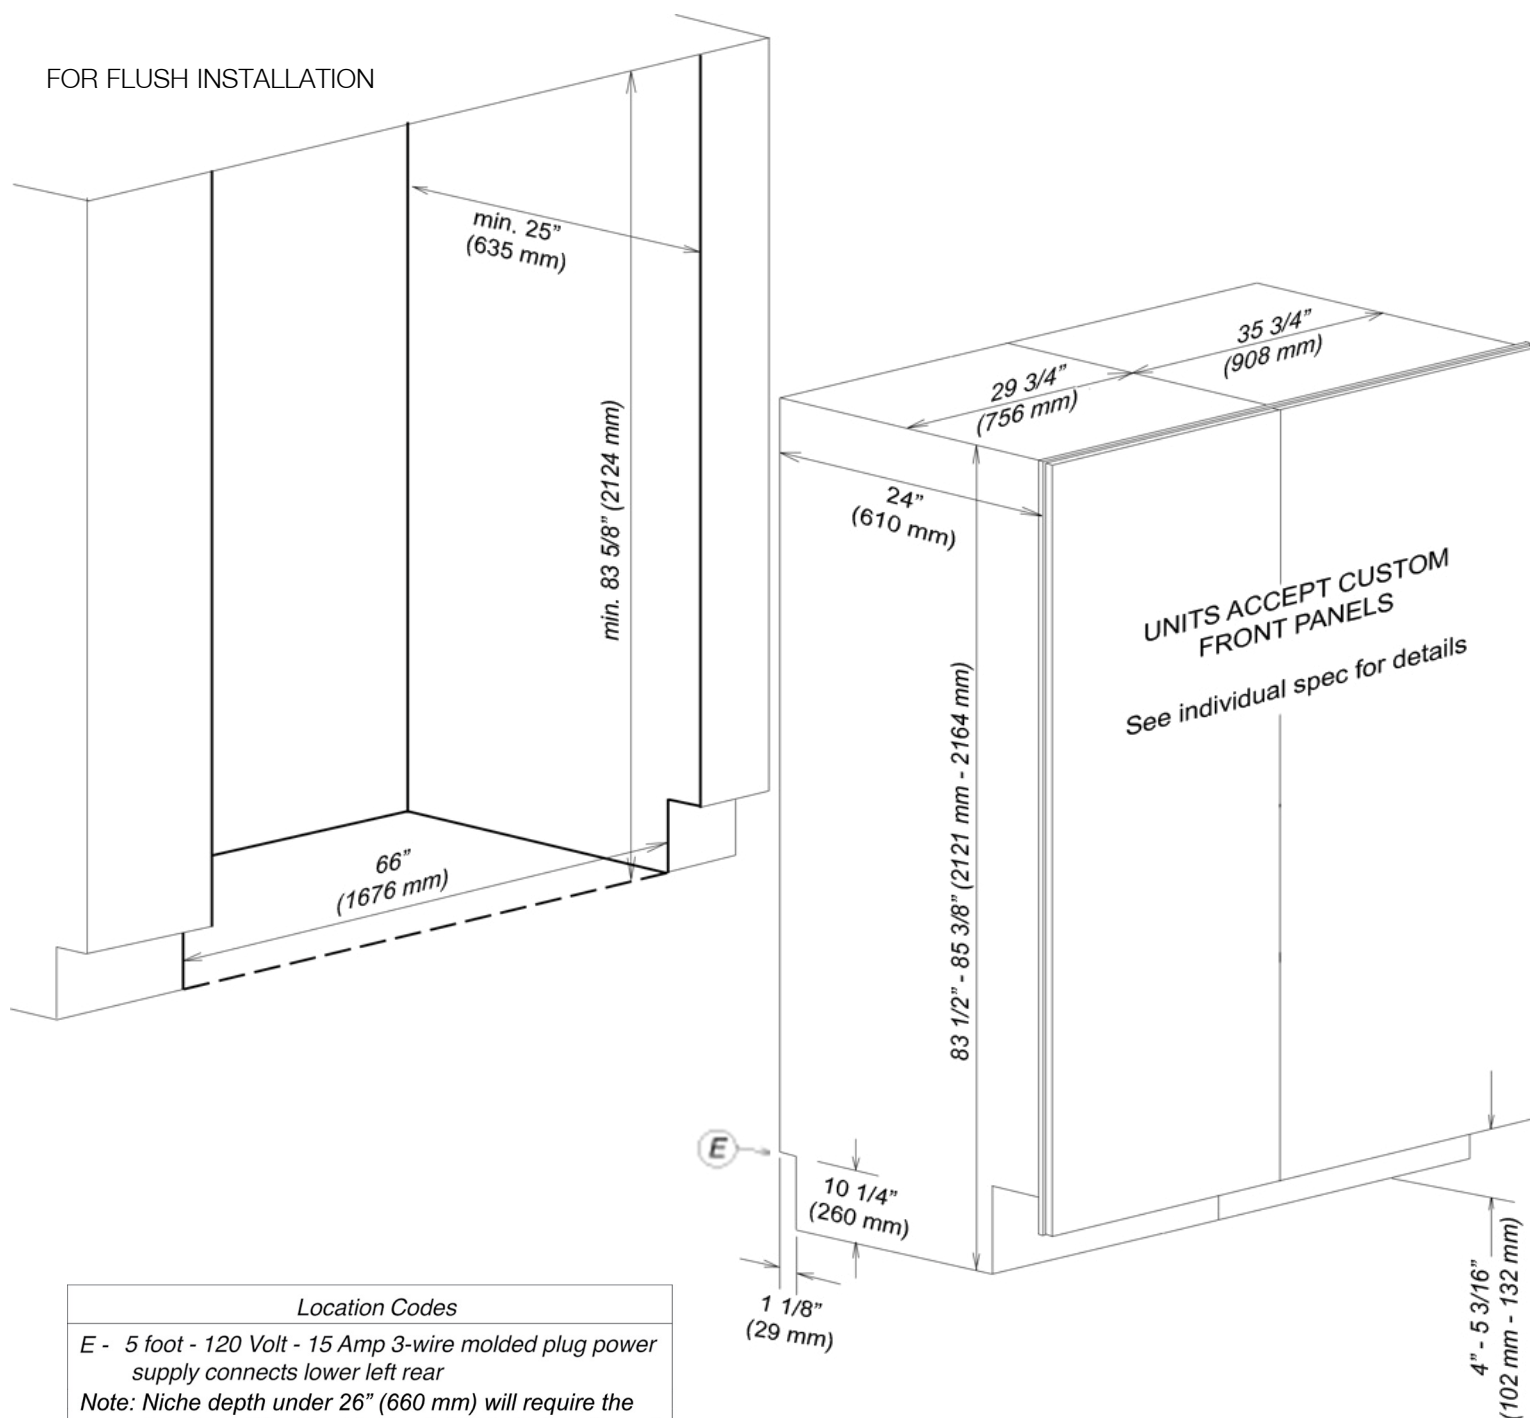

#### Location Codes

*E* - 5 foot - 120 Volt - 15 Amp 3-wire molded plug power supply connects lower left rear

*Note:* Niche depth under 26" (660 mm) will require the location of the Electrical outlet(s) to be in adjacent cabinetry

#### Notes


- KSK1002 Merging kit must be used when combining units
- All Installations must be done in accordance with local codes
- Sides of adjoining cabinets should be filled (flush to frame) to insure proper fit and finish
- For Proud Installation — please adjust accordingly

\*Depth assumes a 3/4" panel, please adjust according to custom panel thickness

# Product and Cut-out Dimensions

## 72" Side-by-Side Combination

### F19X3 Vi & K19X3 Vi

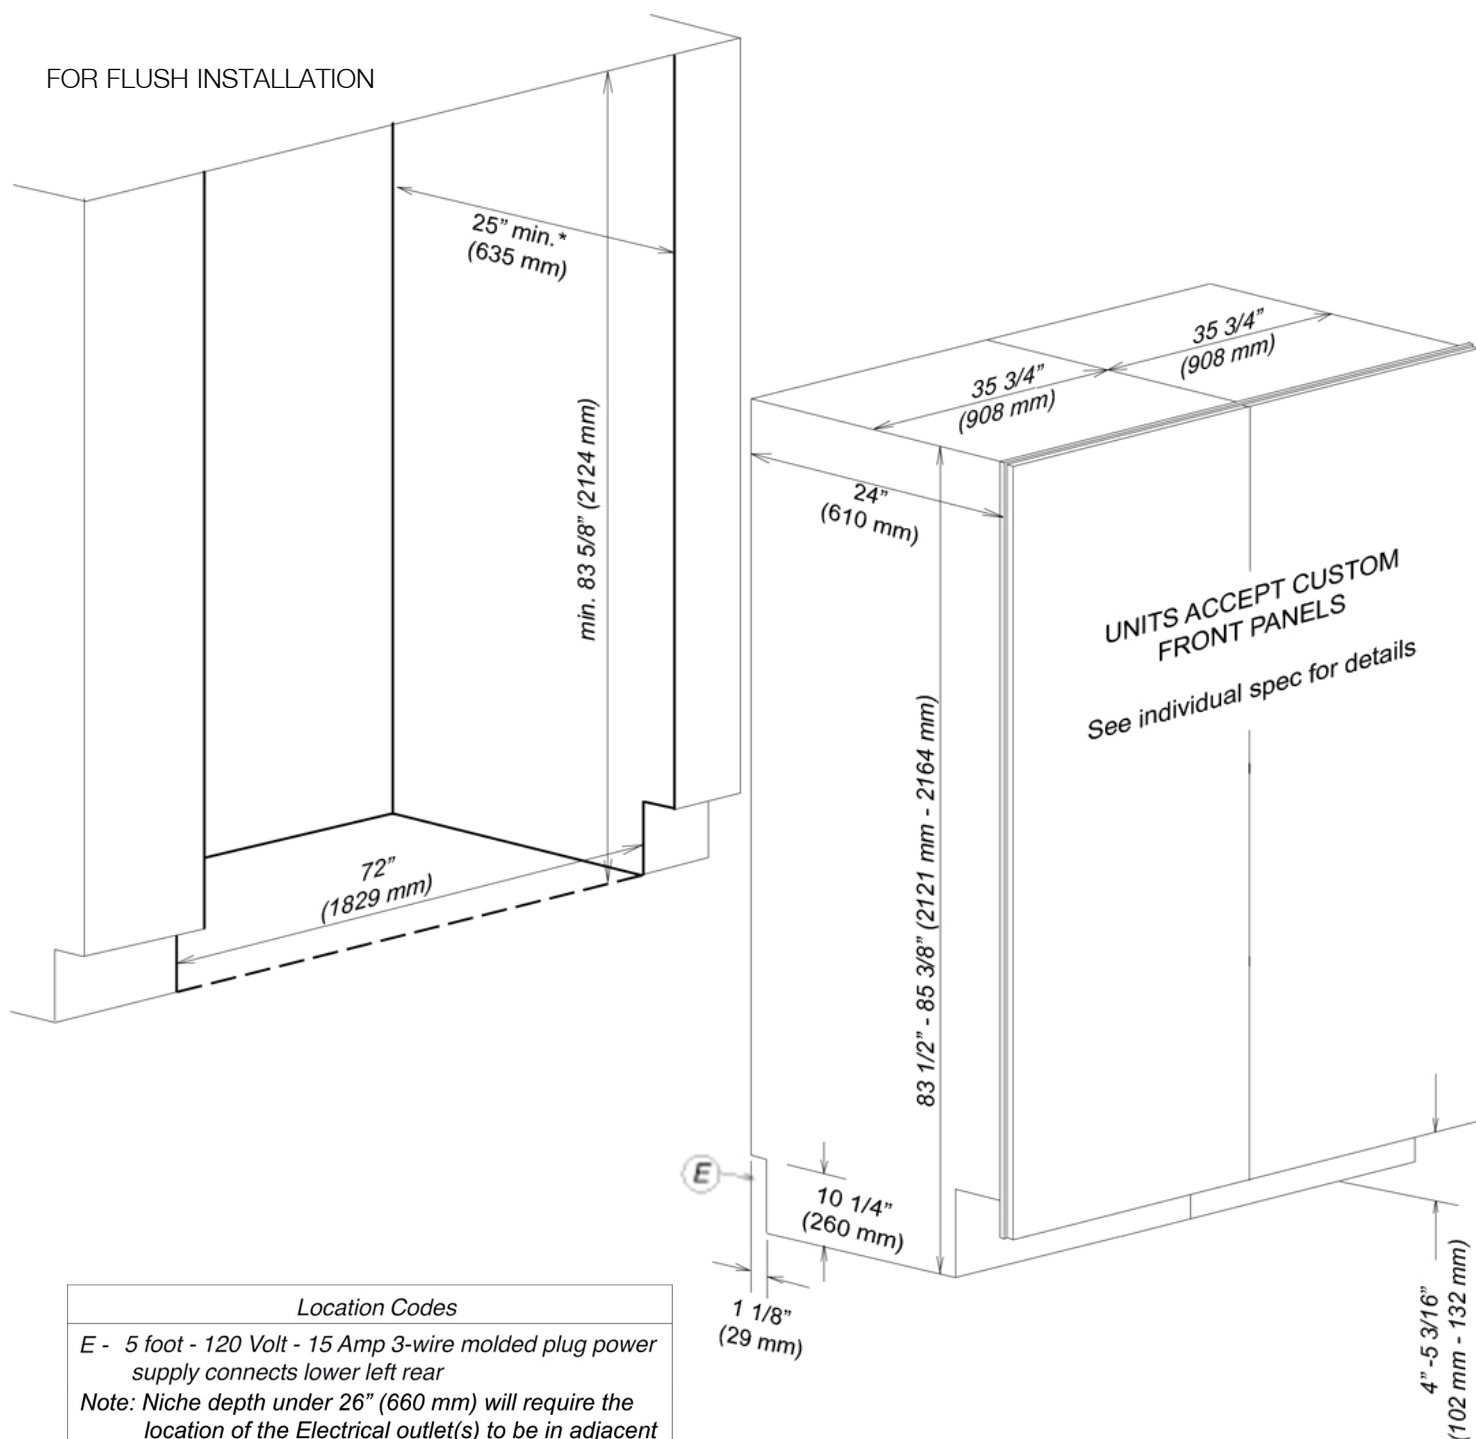

#### Location Codes

**E** - 5 foot - 120 Volt - 15 Amp 3-wire molded plug power supply connects lower left rear

**Note:** Niche depth under 26" (660 mm) will require the location of the Electrical outlet(s) to be in adjacent cabinetry

#### Notes

- KSK1002 Merging kit must be used when combining units
- All Installations must be done in accordance with local codes
- Sides of adjoining cabinets should be filled (flush to frame) to insure proper fit and finish
- For Proud Installation — please adjust accordingly

\*Depth assumes a 3/4" panel, please adjust according to custom panel thickness