KM 8585-2 FL
Induction hob with onset controls
800 mm | PowerFlex cooking area | M Sense ready



- 6 cooking zones incl. 3 powerful PowerFlex cooking areas
- Precise settings via 6 MultiSlidesliders including intelligent networking
- Prepared for cooking and frying assistance with M Sense cookware – M Sense ready
- Shortest heat-up times thanks to Booster level
- A width of 800 mm for surface-mounted or flush-fit installation

EAN: 4002516971399 / Material number: 12948180 /
Old Material Number: 26185854GB

General information	
Model identifier	KM 8585-2 FL
Manufacturer material number	12948180
EAN number	4002516971399
Marketing class	Gold
Heating type	
Heating type	Induction
Construction type	
Independent of cooker	•
Design	
Flush	•
Elegant glass ceramic surface	•
Ceramic surface colour	Black
Surface-mounted installation	•
Cooking zone details	
Number of cooking zones	6
Number of cooking areas	3
Maximum number of pans	6
PowerFlex cooking zones	
No.	6
Type	PowerFlex cooking zone
Diameter in mm	Ø 120 – 230
Rating in W	2100
Booster in W	3650
1st cooking zone/cooking area	
Position	Left
Type	PowerFlex bridge
Size in mm	230x390
Max. Booster power rating in W	7360
Max. rating in W	4200
2nd cooking zone/cooking area	
Position	Centred
Type	PowerFlex bridge
Size in mm	230x390
Max. Booster power rating in W	7360
Max. rating in W	4200
3rd cooking zone/cooking area	
Position	right
Type	PowerFlex bridge
Size in mm	230x390
Max. Booster power rating in W	3650
Max. rating in W	3400
User convenience	
Operation via sensor controls	MultiSlide
Miele@home	•
Con@ctivity	•
Pan and pan size recognition	•
M Sense ready	•

KM 8585-2 FL
Induction hob with onset controls
800 mm | PowerFlex cooking area | M Sense ready



EAN: 4002516971399 / Material number: 12948180 /
Old Material Number: 26185854GB

Display colour	Yellow
Auto heat-up	•
Keeping warm	•
Stop & Go function	•
Recall function	•
Minute minder	•
Safety switch-off	•
Intelligent pan recognition	•
Individual setting options (e.g. buzzers)	•
Assistance programmes	•
Smart Extras	
Push notifications	•
Recipes	•
NFC pairing	•
Smart Extras	
RemoteUpdate	•
Smart Home Integration	•
Efficiency	
Power rating in off mode in W	0.3
Power rating in standby mode in W	0.8
Power rating in networked standby in W	2.0
Time until automatic switch to off mode in min	10
Time until automatic switch to standby in min	10
Time until automatic switch to networked standby in min	10
Cleaning and care	
Easy to clean ceramic glass	•
Wipe protection	•
Safety	
Safety switch-off	•
Lock function	•
System lock	•
Integrated cooling fan	•
Overheating protection	•
Residual heat indicator	•
Technical data	
Dimensions (H x W x D) in mm	51 x 800 x 520
Dimensions (W x D) in mm	800 x 51 x 520
Dimensions in mm (width)	800
Dimensions in mm (height)	51
Dimensions in mm (depth)	520
Cut-out dimensions (W x D) with surface-mounted installation in mm	780 mm x 500 mm
Cut-out dimensions (W x D) with flush-fit installation in mm	780/804 x 500/524
Cutout dimensions in mm (width) with surface-mounted installation	780 mm
Cutout dimensions in mm (depth) with surface-mounted installation	500 mm


KM 8585-2 FL
Induction hob with onset controls
800 mm | PowerFlex cooking area | M Sense ready



EAN: 4002516971399 / Material number: 12948180 /
Old Material Number: 26185854GB


Internal cutout dimensions in mm (width) with flush installation	780
Casing height incl. connection box in mm	51
Internal cutout dimensions in mm (depth) with flush installation	500
Weight in kg	15
External cutout dimensions in mm (width) with flush installation	804
External cutout dimensions in mm (depth) with flush installation	524
Total rated load in kW	9.20
Length of supply lead in m	1.6
Voltage in V	230
Frequency in Hz	50 - 60
Accessories included	
Mains cable	•

KM 8585-2 FL
Induction hob with onset controls
800 mm | PowerFlex cooking area | M Sense ready

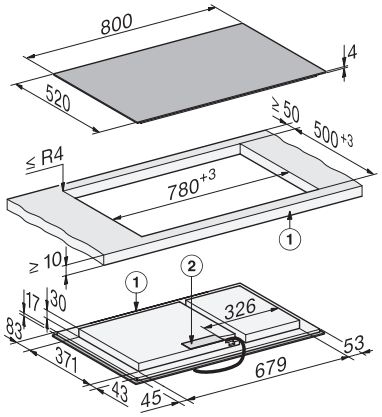

KM8585FL, KM8585FL MattFinish, KM8585-2FL, KM8585-2FL Mattfinish, surface-mounted (*Fußnote) Installation drawing

1) front, 2) Mains connection box, The mains connection cable (L = 1440 mm) is enclosed loose

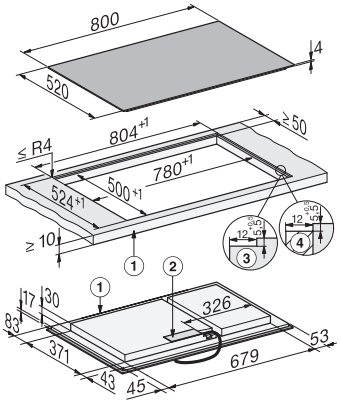

KM8585FL, KM8585FL MattFinish, KM8585-2FL, KM8585-2FL MattFinish, flush (*Fußnote) (Installation drawing)

1) front, 2) Mains connection box, The mains connection cable (L = 1440 mm) is enclosed loosely, 3) Step milling natural stone worktop, 4) Wooden strip 12 mm (no supplied accessories)