

GS251130

Included accessories

- 1 x cleaning cartridge
- 1 x wire rack perforated
- 1 x cooking insert unperforated

Optional accessories

GN340231:
Gastronorm roaster GN 2/3

BA010050:
Core temperature probe

BA010301:
1 Triple pull-out rail for combi-steam

BA020361:
Container st. steel unperf

BA020370:
Container st. steel perf

BA020382:
Container non-stick unperf

BA020391:
Container non-stick perf

BA046118:
Glass tray 60cm

CLS10040:
Cleaning cartridge, 4 pcs.

GN010330:
GN-adapter

GN114130:
GN insert unperf, st. steel, GN1/3, 40mm

GN114230:
GN insert unperf, st. steel, GN2/3, 40mm

GN124130:
GN insert perf, st. steel, GN1/3, 40mm

GN124230:
GN insert perf, st. steel, GN2/3, 40mm

installation accessories

GA601010:
Adjustable intermediate shelf 60cm

combi-steam oven Gaggenau Minimalistic series
60 x 45 cm, door hinge: left
GS251130

- Automatic programmes and setting recommendations enables precise and perfect results
- Full-size side-hinged door with one-touch opening for easy, ergonomic access
- Seamless interface design with refined aesthetics, featuring a floating stainless steel ring and haptic feedback
- The core temperature probe with a 3-point sensor for precise measurement and perfect cooking results. Available as an optional accessory for microwaves and steamers
- Advanced cleaning program delivers pristine results, keeping the appliance spotless with minimal effort

Highlights

- Flush installation.
- Handleless full glass door with electronic door opening.
- Full touch display with stainless steel control ring.
- Light and display response upon user approach.
- Water tank for fresh and waste water for flexible installation.
- External steam generation to avoid limescale in the cooking compartment.
- Automatic cleaning with perfect results, also for heavy soiling.
- Hot air 30 °C to 230 °C, freely combinable humidity levels of 0%, 30%, 60%, 80% or 100%.
- Sous-vide cooking with accurate temperature regulation.
- Full surface grill behind glass ceramic, combinable with circulated air up to 230 °C and steam.
- Automatic programmes and setting recommendations.
- Net volume 50 litres.

Heating methods / Programmes

- Hot air + 100 % humidity.
- Hot air + 80 % humidity.
- Hot air + 60 % humidity.
- Hot air + 30 % humidity.
- Hot air + 0 % humidity.
- Grill + circulated air.
- Grill level 1 + humidity.
- Grill level 2 + humidity.
- Sous-vide cooking.
- Low temperature cooking.
- Dough proving.
- Keeping warm.
- Defrosting.
- Regenerating.
- 200 programmes (automatic programmes and setting recommendations).
- Option to save up to 30 favourites.

Handling

- Cushioned side-opening door with 110 ° opening angle.
- Electronic door opening.
- Full touch display with control ring.
- 42 display languages available.
- User detection, adjustable distance.
- Info texts for additional information.

Animated quick guides to assist appliance operation.

Features

- Full surface grill 2 kW behind glass ceramic.
- Hot air fan rotates in both directions for ideal heat distribution.
- 2 removable 1.7 litre water tanks, dishwasher-safe.
- Connection for core temperature probe (oven temperature probe usable).
- Grill can be added briefly in hot air mode for additional browning.
- Misting for targeted humidity addition.
- Water level warning.
- Automatic boiling point detection.
- Precise temperature control with display of the current temperature.
- Timer functions: cooking time, cooking time end, count-up timer.
- Long-term timer with pre-programmable heating cycles.
- Programmable automatic door opening at cooking time end to avoid overcooking.
- Optimum visibility of the food thanks to side lighting.
- 3 shelf levels.

Selected digital services (Gaggenau Home Connect)

- Remote control and monitoring.
- Software updates.
- Cooking time estimation when using the core temperature probe.
- Door opening via voice assistant.

Safety

- Child lock to prevent accidental switch on or operation of the appliance.
- Electronic door lock to prevent unintentional opening of the appliance door.
- Safety shut-off.
- Thermally insulated door with triple glazing.
- Cooled housing with temperature protection.

Cleaning

- Hygienic stainless steel cooking interior.
- Automatic cleaning.
- Automatic descaling for the steam generator.
- Drying programme.
- Automatic drying of the cavity at the end of the cooking process.
- All removable parts and accessories dishwasher-safe, incl. water tank and stainer filter.

Planning notes

- Plan the niche without back wall.
- Door hinge not reversible.
- No other electrical appliances should be installed above the GS.
- Protrusion from appliance front to furniture cabinet 21 mm.
- This appliance is intended for front flush installation.
- No protruding front panel, horizontal handle, high cabinet top etc. should be fitted directly above the combi-steam oven to prevent damage to the furniture.
- The edge of a worktop must be steam resistant as is required above a dishwasher.

GS251130

When planning a corner solution, pay attention to the side-opening door and the minimum required distance to the wall.

Door opening angle appr. 110° (delivery status) can be reduced to appr. 92° if required.

The mains socket must be accessible and located outside the built-in niche.

Special accessories (order as spare part):


Part No. 17002490 Descaling tablets.

Connection

Energy efficiency class A at a range of energy efficiency classes from A+++ to D.

Total connected load 3.1 KW.

Connection cable 1.75 m, pluggable.

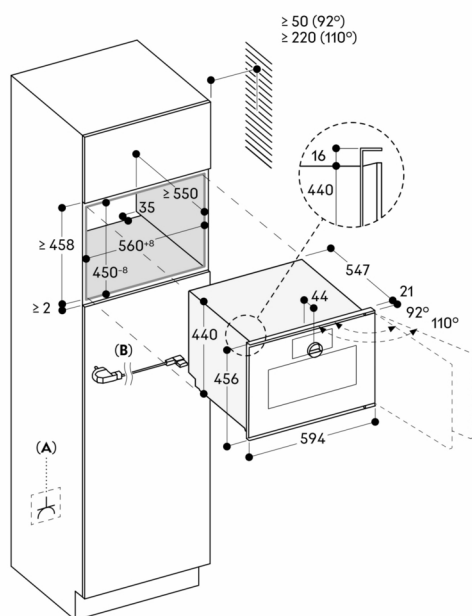

A: Accessible electrical connection

B: Cable with or without plug, depending on country

Measurements in mm