



Color Variants

RVC467190
With fresh climate drawers.
Fully integrated.

Included accessories

1 x egg box with lid.
2 x wooden bottle holder magnetic.
1 x Ethylene absorber.

Optional accessories

RA430100
Storage container with transparent lid, anthracite.
RVA016701
RVA016801
RVA438040
RVA450220

Installation Accessories

RA425110
Handle bar, stainless steel, long
RA460020
Connecting element for vertically split appliance fronts (for a flush front).
RVA421620
RVA423141
RVA428620
RVA460000
RVA460020
RVA466600

RVC467190
Vario refrigerator Expressive series
With fresh climate drawers.
Fully integrated.
Niche width 61 cm, Niche height 213.4 cm.



Highlights

Dark brushed stainless steel interior, refined with solid anthracite aluminium elements.
Warm white and glare-free LED light concept for optimal food presentation in all compartments.
Opening assist for door with two options:
1. Push-to-open function for integration into handleless furniture front 2. Pull-to-open function to facilitate opening the door using a handle
The drawers in the RVC and RVF models are positioned at the same height. With side-by-side installation, the glass shelves and door racks can be aligned on the same level.
Flexible positioning of shelves and door racks through hidden rail system.
Flat dark brushed stainless steel inner door.
Professional freshness system with 2 fresh climate drawers and 1 chilled drawer.
Full touch TFT display.
Total volume: 357 litres.

Handling

Opening assist for door.
Cushioned door closing system.
User guidance through light and display response to drawer interaction.
Automatic brightness adjustment based on ambient illumination.
Easy accessible full touch TFT display with clear text.
Animated quick guides to assist appliance maintenance.

Technical features

Dynamic cold air distribution.
Automatic defrosting with defrost water evaporation.
Constant air purification by 2 activated charcoal air filters.
Rest mode certified by Star-K.
When rest mode is active, the appliance can only be opened using a handle.
Open-door and malfunction alarm.

Selected digital services (Gaggenau Home Connect)

Remote control and monitoring.
Remote diagnostics.
Personalisation function for saving custom programmes.

Cooling

Professional freshness system.
No-Frost technology with fast cooling.
Temperature adjustable from +2 °C to +8 °C.
2 aluminium-framed safety glass shelves, individually adjustable in height.
1 integrated safety glass shelf.
Optimal food presentation with warm white and glare-free, hidden LED light bars (3000 K).
Flexible positioning of door racks through hidden rail system.
4 height-adjustable door racks, 1 of which is extra deep.

Fresh climate drawer

1 fresh climate drawer with temperature adjustable from -1 °C to +2 °C.
1 fresh climate drawer with temperature adjustable from -1 °C to +8 °C.

Characteristics

Gross weight
356.000
Energy Efficiency Class (Regulation (EU) 2017/1369)
E
Average annual energy consumption in kilowatt hour per year (kWh/a)
150
Sum of volume of frozen compartments
0
Sum of volume of chill compartments
357
Airborne acoustical noise emissions
40
Airborne acoustical noise emission class
C
Built-in / Free-standing
Built-in
Number of compressors
1
Number of independent cooling systems
1
Width of the appliance
603
Height
2123
Depth of the product
608
Net weight
144.5
Required niche size for installation (HxWxD)
2134 x 610 x 610
Door panel options
Not possible
Door hinge
Right reversible
Number of Adjustable Shelves in fridge compartment
3
Shelves for Bottles
No
Frost free system
Fridge and freezer
Interior ventilator
No
Reversible Door Hinge
Yes
Length electrical supply cord
300.0
Noise level
40
Multi-Flow Air Tower
Yes
Economy setting
Yes
Cold technology
1 compressor/1 cold circuit
Fast cooling switch
Yes
Temperature Controlled Drawer
No
Humidity Control Drawer
Yes
Number of Door Bins - Refrigerator
3
Door bin adjustability - Refrigerator
Yes
Tilt-out door bins in fridge
No
Gallon wide door bins
Yes
Number of Gallon storage
1
Motorized Shelf
No
Material of the shelves
Glas
Type of Light
Door opened indicator freezer
No
Connection Rating
300
Fuse protection
10
Voltage
220-240
Frequency
50-60
Enerav consumption

Ideal storage conditions for different foods through dedicated programmes (e.g. Fruit, Vegetables, Meat and Cold sensitive food).
Individual adjustment of temperature and humidity.
Extended food preservation with ethylene absorber.
Indirect illumination, transparent front.
Fully extendable, with cushioned closing system.

Chilled drawer

Temperature dependent on cooling compartment (always 2K to 3K lower).
Indirect illumination, transparent front.
Fully extendable, with cushioned closing system.

Consumption data

Energy efficiency class E at a range of energy efficiency classes from A to G.
Energy consumption 150 kWh/year.
Noise level 40 dB (A) re 1 pW.

Planning notes

Flat hinge.
Door hinge right, reversible.
Door opening angle of 115°, fixable at 90°.


Connection

Total connected load: 0.300 KW.
Connecting cable 3.0 m, pluggable.

GAGGENAU

RVC467190
Vario refrigerator Expressive series
With fresh climate drawers.
Fully integrated.
Niche width 61 cm, Niche height 213.4 cm.

2025-06-29
Page 2

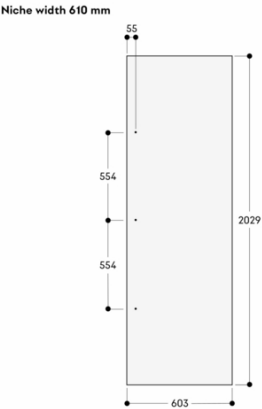


The door panel thickness is 19 mm
The maximum door panel dimensions are based on a clearance of 3 mm,
based on a single niche

Measurements in mm




The door panel thickness is 19 mm
The maximum door panel dimensions are based on a clearance of 3 mm,
based on a single niche

Measurements in mm

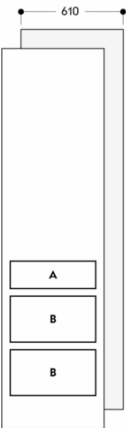

A: Chilled drawer
B: Fresh climate drawer
Measurements in mm

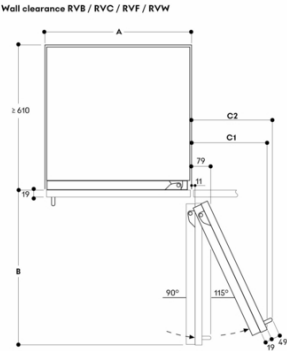


Niche width

A	B	C1	C2
457	525	235	265
610	677	299	330
762	830	364	395
900	970	420	442

The drawing is based on a door panel thickness of 19 mm as well as the height of a Gaggenau handle of 49 mm

Measurements in mm

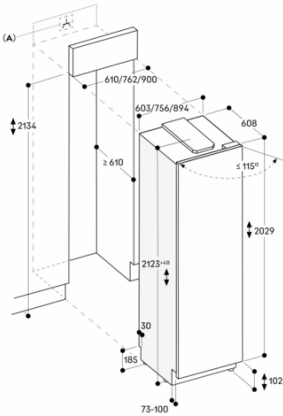

A: Electrical connection
Maximum door panel dimensions are based on a clearance of 3 mm
The height of the plinth can be reduced to 50 mm
Measurements in mm