



Color Variants

RVF417190
Fully integrated, with ice maker.
Niche width 45.7 cm, Niche height 213.4 cm.

Included accessories

1 x ice cube scoop.
1 x Ice storage container.
large.

Optional accessories

RA450012

Installation Accessories

RA425110
Handle bar, stainless steel, long
RA460020
Connecting element for vertically split
appliance fronts (for a flush front).
RVA421120
RVA423141
RVA428120
RVA460000
RVA460020
RVA466100

RVF417190
Vario freezer Expressive series
Fully integrated, with ice maker.
Niche width 45.7 cm, Niche height 213.4 cm.



Highlights

Dark brushed stainless steel interior, refined with solid anthracite aluminium elements.
Warm white and glare-free LED light concept for optimal food presentation in all compartments.
Opening assist for door with two options:
1. Push-to-open function for integration into handleless furniture front 2. Pull-to-open function to facilitate opening the door using a handle
The drawers in the RVC and RVF models are positioned at the same height. With side-by-side installation, the glass shelves and door racks can be aligned on the same level.
Flexible positioning of shelves and door racks through hidden rail system.
Flat dark brushed stainless steel inner door.

Handling

Opening assist for door.
Cushioned door closing system.
User guidance through light and display response to drawer interaction.
Automatic brightness adjustment based on ambient illumination.
Hidden touch display.

Technical features

Dynamic cold air distribution.
Automatic defrosting with defrost water evaporation.
Rest mode certified by Star-K.
When rest mode is active, the appliance can only be opened using a handle.
Open-door and malfunction alarm.

Selected digital services (Gaggenau Home Connect)

Remote control and monitoring.
Remote diagnostics.

Freezing

No-frost technology with fast freezing at -30 °C.
4-star freezer compartment.
Temperature adjustable from -24 °C to -16 °C.
Freezer burn protection.
Oxidation protection.
Warm-white, glare-free LED lighting (3000 K).
2 aluminium-framed safety glass shelves, individually adjustable in height.
Flexible positioning of door racks through hidden rail system.
4 height-adjustable door racks.
3 fully extendable drawers, with cushioned closing system.

Ice maker

Hidden in one drawer for optimised usable space.
With fixed water connection (inlet).
Can be switched off.
Integrated, easy accessible ice cube scoop.
Particle filter for water inlet, integrated in ventilation grille area.
Saturation indicator shown in touch display.

Consumption data

Energy efficiency class D at a range of energy efficiency classes from A to G.

Planning notes

Flat hinge.
Door hinge left, reversible.

Characteristics

Energy Efficiency Class (Regulation (EU) 2017/1369)
D
Average annual energy consumption in kilowatt hour per year (kWh/a)
Sum of volume of frozen compartments
Airborne acoustical noise emissions
Airborne acoustical noise emission class
Product category
Upright freezer
Built-in / Free-standing
Built-in
Color / Material body
Frost free system
Fridge and freezer
Climate class
SN-T
Door panel options
Width of the appliance
451
Depth of the product
608
Dimensions of the packed product (HxWxD)
2270 x 550 x 745
Required niche size for installation (HxWxD)
2134 x 457 x 610
Warning signal / malfunction
No signal
Defrost
Cover door installation system
Fixed-mounted
Number of drawers/baskets (Stck)
3
Number of freezing flaps (Stck)
0
Lockable door
No
Thermometer freeze section
Not applicable
Light
Yes
Length electrical supply cord
300.0
Door hinge
Other
Net weight
130.9
Gross weight
145.6
Multi-Flow Air Tower
No
Number of compressors
1
Number of independent cooling systems
1
Economy setting
No
Fast freezing function
No
Number of Door Bins - Freezer
3
Door bin adjustability - Freezer
No
Tilt-out door bins in freezer
No
Number of shelves - Freezer
Door bin adjustability - Freezer
No
Shelf Material - Freezer
Reversible Door Hinge
No
Connection Rating
Fuse protection
10
Frequency
50-60
Energy consumption
Total annual energy consumption
Universal Product Code
Door panel options
Installation typology
Full-integrated
Noise level
39
ENERGY STAR® certified
No
Length of electrical supply cord (in)

Door opening angle of 115°, fixable at 90°.

Shut-off valve for water connection must be planned next to the appliance and always be accessible.

If the water pressure exceeds 0.8 MPa (8 bar), connect pressure relief valve between water tap and hose set.


Connection

Connecting cable 3.0 m, pluggable.
Water inlet.

GAGGENAU


RVF417190
Vario freezer Expressive series
Fully integrated, with ice maker.
Niche width 45.7 cm, Niche height 213.4 cm.

2025-06-29
Page 2

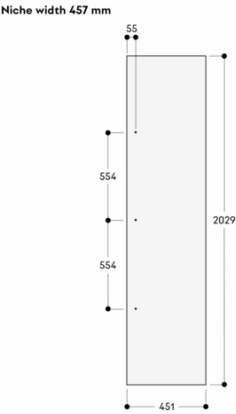


The door panel thickness is 19 mm
The maximum door panel dimensions are based on a clearance of 3 mm,
based on a single niche

Measurements in mm

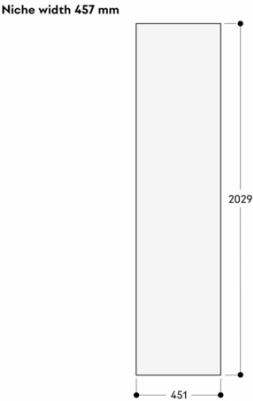


The door panel thickness is 19 mm
The maximum door panel dimensions are based on a clearance of 3 mm,
based on a single niche

Measurements in mm



C: Ice maker

Measurements in mm

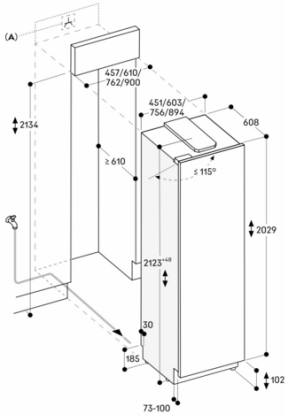


A: Electrical connection

Maximum door panel dimensions are based on a clearance of 3 mm

The height of the plinth can be reduced to 50 mm

Measurements in mm

Wall clearance RVB / RVC / RVF / RVH



Niche width

A	B	C1	C2
457	525	285	265
610	677	299	330
762	830	364	395
900	970	420	442

The drawing is based on a door panel thickness of 19 mm as well as the
height of a Gaggenau handle of 49 mm

Measurements in mm