

H 2860 B

Oven

seamless design with clear text display and PerfectClean.



- 7-segment display with retractable controls – EasyControl
- Particularly easy to clean - PerfectClean finish
- Lots of room and flexibility – 76 l cooking capacity on 5 levels
- Easy handling – FlexiClip runners
- Protects against burns – touch-cool fronts

A⁺

EAN: 4002516130505 / article number: 22286024D / material number: 11103950

Model and design	
Built-in oven	•
VitroLine	•
Appliance colour	Obsidian black
Retractable knobs	•
Convenience features	
Rapid heat-up	•
Operating modes	
Defrosting	•
Grill	•
Fan plus	•
Intensive bake	•
Conventional heat	•
Bottom heat	•
Fan grill	•
User convenience	
Display	EasyControl
SoftClose	•
Time of day display	•
Minute minder	•
Programmable end of cooking duration	•
Programmable cooking duration	•
Actual temperature display	•
Target temperature display	•
Audible signal when target temperature is reached	•
Recommended temperature	•
Individual settings	•
Efficiency and sustainability	
Energy efficiency class (A+++ - D)	A+
Cleaning convenience	
Oven compartment with PerfectClean and catalytically enamelled liners	•
Hinged grill heater element	•
CleanGlass door	•
Safety	
Appliance cooling system and touch-cool fronts	•
Safety switch-off	•
System lock	•
Accessory drawer	
Capacity	76

H 2860 B

Oven

seamless design with clear text display and PerfectClean.




Technical data	
Oven compartment volume in l	76
No. of shelf levels	5
Numbered shelf levels	•
Oven light	1 halogen spot
Appliance width in mm	595
Appliance height in mm	596
Appliance depth in mm	569
Weight in kg	39,0
Total rated load in kW	3,5
Voltage in V	220-240
Frequency in Hz	50
Number of phases	1
Fuse rating in A	16
Mains cable with plug	•
Length of supply lead in m	1,7
Standard accessories	
Baking tray with PerfectClean	1
Universal tray with PerfectClean	1
Baking and roasting rack	1
FlexiClip runners	1

H 2860 B


Oven

seamless design with clear text display and PerfectClean.

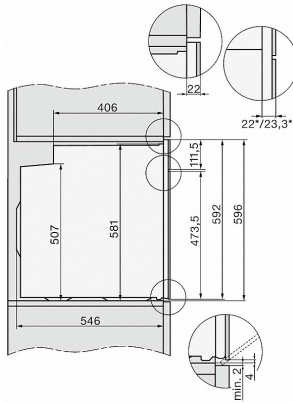


H2760B/BP, H28x0B/BP, H7x6xB/BP/BPX, installation drawings, GB, AUS

22 mm - glass
23,3 mm - metal

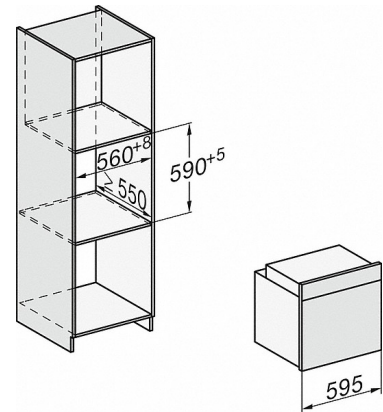


H226x-1B/BP/E/EP/1/P, H2760B/BP, H28x0B/BP, H7x6xB/BP/BPX, installation drawings

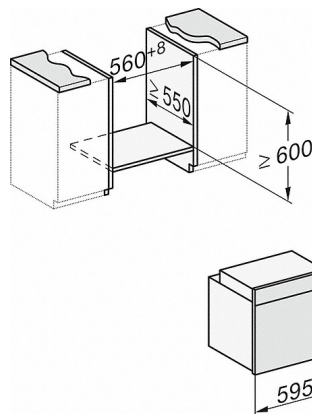


H226x-1B/BP/E/EP/1/P, H2x6xB/BP, H7x6xB/BP/BPX, installation drawings

If the oven is to be installed under a hob, follow the instructions for installing the hob and the height of the hob.

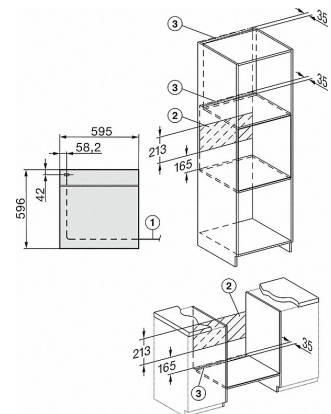


H226x-1B/E/1, H2x6xB, H7x6xB, installation drawings

- 1) Mains connection cable, L=2000 mm
- 2) No connection in this area
- 3) Lüftungsausschnitt min. 150 cm²

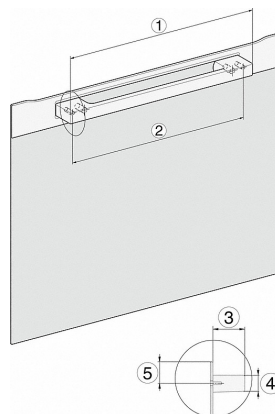

DG2840, DG7x40, DGC7x4x, DG7x6x, DGC7x6x, DGD7635, DGM7x4x, DO7, H28B/BP, H7x4xB/BM/BP,

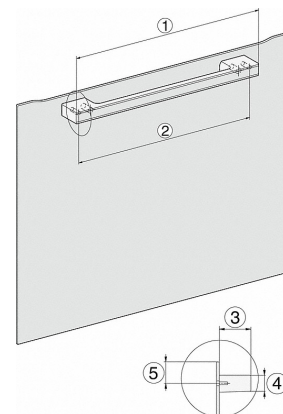


DG7x40, DGC7x4x, DGC7x6x, DG7635, DGM7x4x, DO7, H2860B/BP, H240BM, H7x40BM, H7x4xB/BP,

H 2860 B


Oven

seamless design with clear text display and PerfectClean.

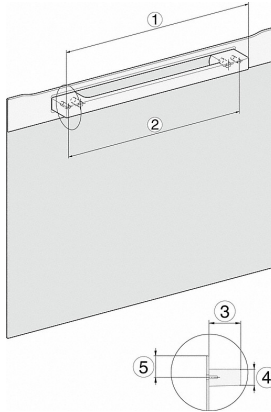


H7x6xB/BP, installation drawing

- 1) 400 mm
- 2) 360 mm
- 3) 47 mm
- 4) 24 mm
- 5) 31,8 mm

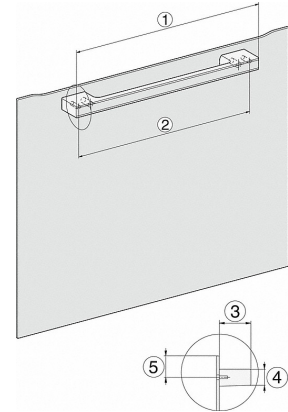

H7x6xB/BP, installation drawings

- 1) 400 mm
- 2) 360 mm
- 3) 47 mm
- 4) 27 mm
- 5) 32,5 mm

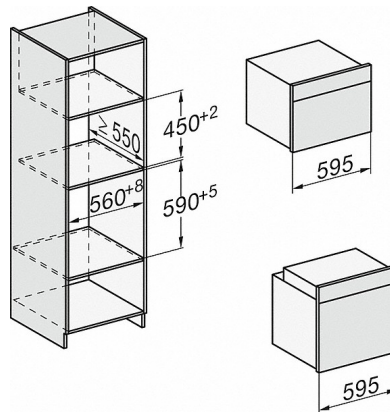

H226x-1B/BP/E/EP/IP, H2760B/BP, H28x0B/BP,
H7x40BM/BMX, H7x6xB/BP/BPX, installation drawings