



Integrated Series Model S8991TST



Dimensions	
Width	887 mm
Height	2050 mm
Depth	610 mm
Weight Net	225 kg
Minimum Niche Height	2064 mm
Door Clearance	1470 mm
Door Opening Angle	<105°

Technical Specifications	
Energy Efficiency Class	A+
Energy Usage	453 Kwh
Noise Level	40 dB
Fridge/Riserva Compart. Capacity	263 l
Fresco/Wine Cellar Compart. Capacity	125 l
TriMode Compart. Capacity	108 l


Features	
Fridge Compartment	
Shelves	2+2 EvenLift
Door Shelves	3
Fresco Compartment	
Shelves	-
Drawers	2 Fresco
TriMode Compartment	
Large Drawers	1
Inner Drawers	1+ice tray*

Model Options	
Door Opening Left (3) /Right (6)	✓
Ice Maker	✓

Connection data	
Voltage	AC 220-240V 50 Hz
Power supply cable	Schuko 16 A
Length power supply cable	2.0 mt
Water supply tube (female attachment)	3/4"

Specify if right hinge (6) or the left hinge (3)


Installation niche features

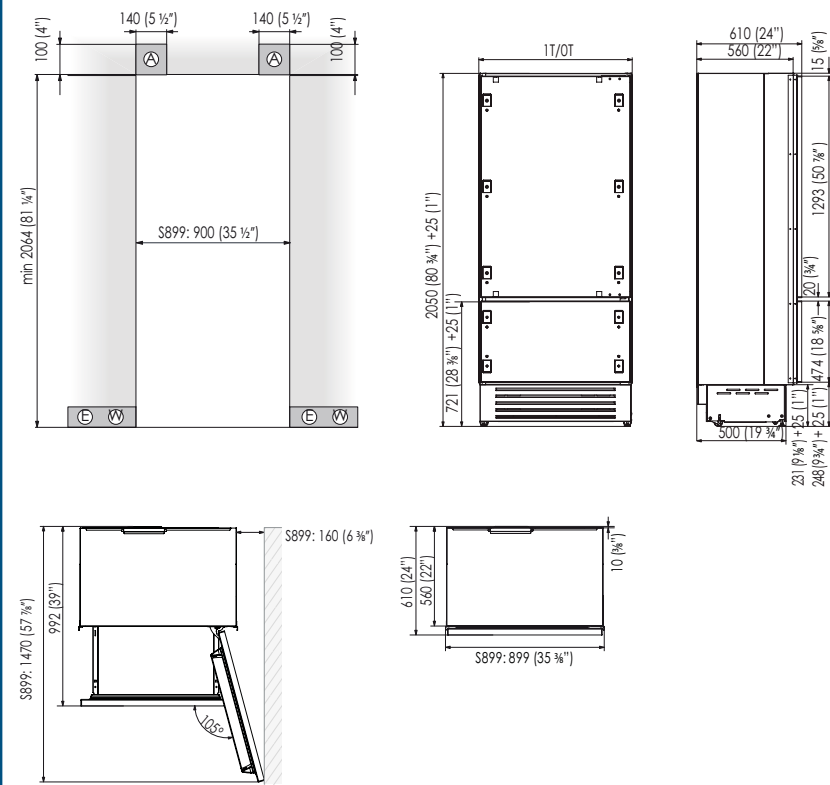

Accessories


Description	Code
Stainless steel sides	FKK65T
Joining kit - central (Joining brackets, airflow separation included)	KCCIT
Joining kit - central (models with stainless steel sides) Joining brackets, airflow separation included+anti-condensation kit)	KCCITX
Extra Length Anti-tipping Kit	B04000900
Anticondensation Kit adhesive 1,6 cm thick	KAC16
Cleaning kit microfiber cloth and 1 magic sponges	RP00KP
Water filter	RP00FA
Transformer for network integration with alternative energy (photovoltaic and geothermal energy, home automation, etc.)	KITNRG899749
Vertical tubular handle	HV
Horizontal tubular handle	HO8

Flush installation

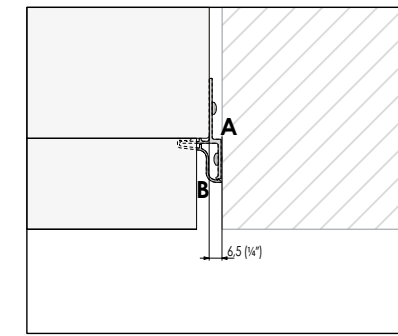


The Lateral Connection Kit (KCLIT/KCLIH/KCLMT/KCLMH) is supplied on all models (except in the unit with stainless steel sides) and consists of a connection element (A) and a aluminium frame (B).

Prominent installation

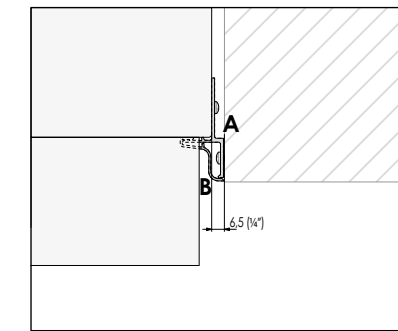


The Lateral Connection Kit (KCLIT/KCLIH/KCLMT/KCLMH) is supplied on all models (except in the unit with stainless steel sides) and consists of a connection element (A) and a aluminium frame (B).

Electrical and Water connection

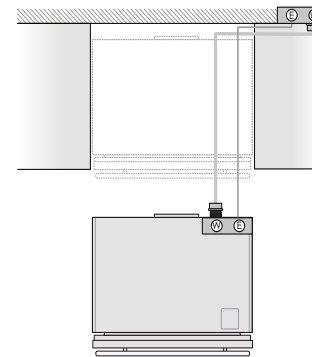

Electrical and Water connection behind the unit



Panel dimensions

Panels with width ranging between 18 mm (3/4 in) and 28 mm (1 1/8 in).
Door panels with weight max of 23 kg (51 lb) and drawer panels with weight max of 11 kg (25 lb).
Provide installation of decorative panels during installation of the unit.

Series	Door/Drawer Width A	Door Cutout Width B
899	897 (35 1/4")	627 (24 3/4")

