

H 7464 BP

Oven

seamless design with food probe and LED lighting.



- Large clear text display with sensor controls – DirectSensor
- Minimal cleaning effort – pyrolytic cleaning equipment & PyroFit
- Especially light dough and nicely browned crusts – Moisture plus
- Ensures your food won't overcook – TasteControl
- Network-enabled WiFi appliance – Miele@home

A⁺

EAN: 4002516132837 / article number: 22746435D / material number: 11105720

| Model and design | |
|---|---------------|
| Built-in oven | • |
| VitroLine | • |
| Appliance colour | Graphite grey |
| Convenience features | |
| TasteControl | • |
| Rapid heat-up | • |
| Pre-heating | • |
| Food probe | • |
| Keeping warm | • |
| Crisp function | • |
| Operating modes | |
| Defrosting | • |
| Automatic programmes | • |
| Country-specific automatic programmes | • |
| Auto roast | • |
| Grill | • |
| Fan plus | • |
| Intensive bake | • |
| Moisture plus | • |
| Moisture plus with Fan plus | • |
| Moisture plus with Conventional heat | • |
| Conventional heat | • |
| Bottom heat | • |
| Fan grill | • |
| User convenience | |
| Display | DirectSensor |
| SoftClose | • |
| MultiLingua | • |
| Programmable timed steam injection | • |
| Time of day display | • |
| Clock synchronisation | • |
| Date display | • |
| Minute minder | • |
| Programmable start of cooking duration | • |
| Programmable end of cooking duration | • |
| Programmable cooking duration | • |
| Actual temperature display | • |
| Target temperature display | • |
| Audible signal when target temperature is reached | • |
| Recommended temperature | • |
| User programmes | 20 |
| Individual settings | • |
| Efficiency and sustainability | |
| Energy efficiency class (A+++ - D) | A+ |
| Residual heat utilisation | • |

H 7464 BP

Oven

seamless design with food probe and LED lighting.




| | |
|--|------------|
| Cleaning convenience | |
| Pyrolytic self-cleaning | • |
| Unheated catalyser | • |
| Hinged grill heater element | • |
| CleanGlass door | • |
| Appliance networking | |
| Miele@home | • |
| MobileControl | • |
| RemoteService | • |
| WiFiConn@ct | • |
| Safety | |
| Appliance cooling system and touch-cool fronts | • |
| Safety switch-off | • |
| System lock | • |
| Door lock during pyrolytic cleaning | • |
| Sensor lock | • |
| Accessory drawer | |
| Capacity | 76 |
| Technical data | |
| Oven compartment volume in l | 76 |
| No. of shelf levels | 5 |
| Numbered shelf levels | • |
| Oven light | 1 LED spot |
| Appliance width in mm | 595 |
| Appliance height in mm | 596 |
| Appliance depth in mm | 568 |
| Weight in kg | 47,0 |
| Total rated load in kW | 3,6 |
| Voltage in V | 220-240 |
| Frequency in Hz | 50 |
| Number of phases | 1 |
| Fuse rating in A | 16 |
| Mains cable with plug | • |
| Length of supply lead in m | 1,7 |
| Standard accessories | |
| Baking tray with PerfectClean | 1 |
| Universal tray with PerfectClean | 1 |
| Baking and roasting rack PyroFit | 1 |
| PyroFit FlexiClip runners | 1 |
| Descaling tablets | 2 |

H 7464 BP


Oven

seamless design with food probe and LED lighting.

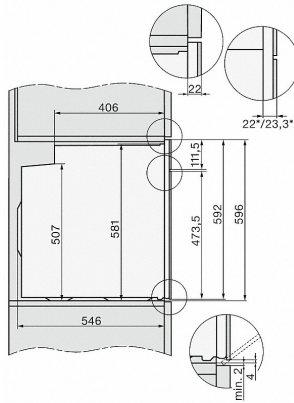


H2760B/BP, H28x0B/BP, H7x6xB/BP/BPX, installation drawings, GB, AUS

22 mm - glass
23,3 mm - metal

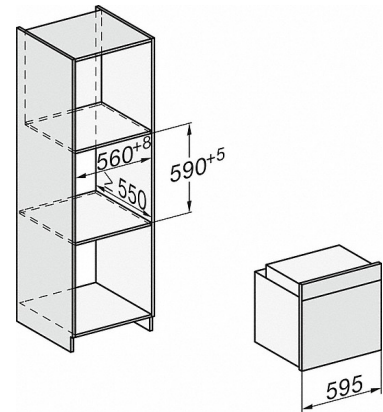


H226x-1B/BP/E/EP/I/IP, H2760B/BP, H28x0B/BP, H7x6xB/BP/BPX, installation drawings

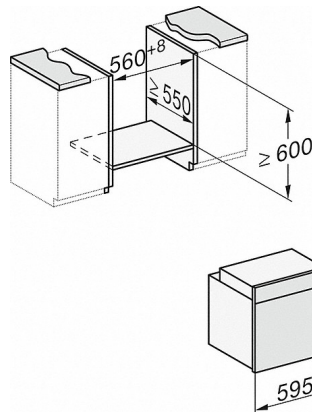

H226x-1B/BP/E/EP/I/IP, H2x6xB/BP, H7x6xB/BP/BPX, installation drawings

If the oven is to be installed under a hob, follow the instructions for installing the hob and the height of the hob.

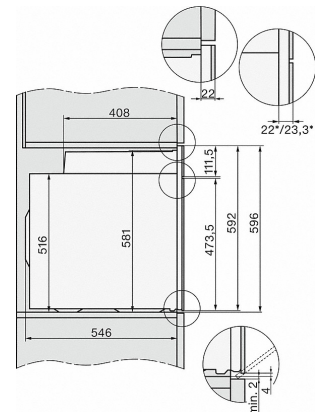


H2x6x-1B/BP/E/EP/I/IP, H2850BP, H7x6xB/BP/BPX, H2x6xB, installation drawings

- 1) Mains connection cable, L=2000 mm
- 2) No Connection in this area
- 3) Lüftungsausschnitt min. 150 cm²

H 7464 BP


Oven

seamless design with food probe and LED lighting.

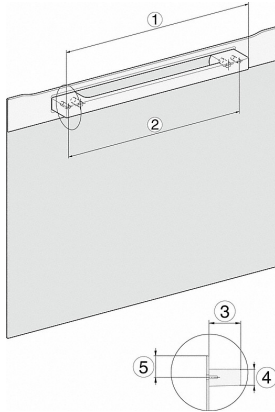


DG2840, DG7x40, DGC7x4x, DG7x6x, DGC7x6x, DGD7635, DGM7x4x, DO7, H28B/BP, H7x4xB/BM/BP, H7x6xB/BP, installation drawing

- 1) 400 mm
- 2) 360 mm
- 3) 47 mm
- 4) 24 mm
- 5) 31,8 mm

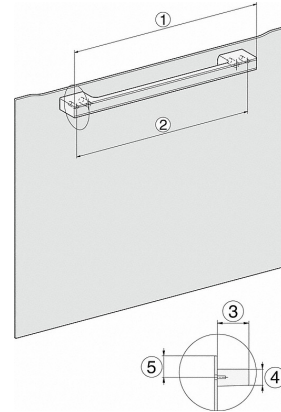

DG7x40, DGC7x4x, DGC7x6x, DG7635, DGM7x4x, DO7, H2860B/BP, H240BM, H7x40BM, H7x4xB/BP, H7x6xB/BP, installation drawings

- 1) 400 mm
- 2) 360 mm
- 3) 47 mm
- 4) 27 mm
- 5) 32,5 mm

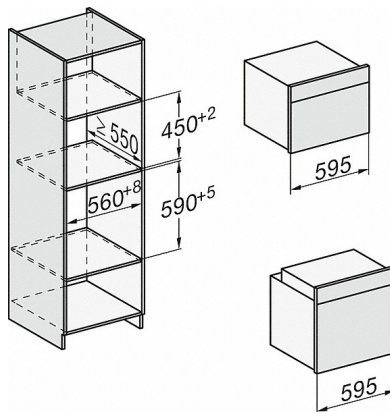

H226x-1B/BP/E/EP/IP, H2760B/BP, H28x0B/BP, H7x40BM/BMX, H7x6xB/BP/BPX, installation drawings