



**Color Variants**

**VG415111F**  
**Stainless steel**  
**Width 38 cm**

**Included accessories**

1 x WOK attachment ring.

**Optional accessories**

**WP400001**  
**Wok pan made of multiple-layer material**

**Installation Accessories**

**VA420004**  
**Connection strip for combination with other Vario appliances of the 400 series for flush mounting**  
**VA420010**  
**Connection strip for combination with other Vario appliances of the 400 series for surface mounting**  
**VA440010**  
**Stainless steel appliance cover with mounting strip**

**VG415111F**  
**Vario gas wok 400 series**  
**Stainless steel**  
**Width 38 cm**  
**Liquid gas 28 - 37 mbar**  
**Wok burner with up to 5.8 KW**

Multi-ring burner with up to 5.8 KW  
Full electronic power level regulation on 12 levels  
Precise and reproducible flame size  
Automatic fast ignition, electronic flame monitoring with automatic re-ignition  
Simmer function for cooking on a very low output level  
Solid stainless steel control knob  
Precision crafted 3 mm stainless steel  
For surface mounting with a visible edge or for flush mounting  
Can be combined perfectly with other Vario appliances of the 400 series

**Cooking zones**

1 multi-ring wok burner (300 W – 5800 W), suitable for pots up to max. ø 32 cm.

**Handling**

Control knobs with illuminated ring, cooking zone and output level markings.  
One-handed operation.  
Full electronic control in 12 output levels for exact power level regulation plus simmer function.  
Automatic fast ignition.

**Features**

Simmer function.  
Cast iron pan support with flat, continuous pot surface.  
Brass burner rings.

**Safety**

Electronic flame monitoring with automatic re-ignition.  
Residual heat indication.  
Safety shut-off.

**Planning notes**

Depending on the type of installation (surface-mounted or flush-mounted, with or without an appliance cover), the specific location of the cut-out and the knob positions may vary.  
The drawing "Installation of the control knob" must be observed if the panel is more than 23 mm thick (there must be a recess at the rear).  
If combining several Vario appliances of the 400 series, a connection strip VA 420 must be placed between the appliances. Depending on the type of installation, the corresponding connection strip must be provided.  
The bearing capacity and stability, in the case of thinner worktops in particular, must be supported using suitable substructures. Take into account the appliance weight and additional loads.  
Additional instructions for flush mounting:  
Installation is possible in worktops made of stone, synthetics or solid wood. Heat resistance and watertight sealing of the cut edges must be observed. Concerning other materials please consult the worktop manufacturer.  
The groove must be continuous and even, so that uniform placing of the appliance on the gasket is ensured. Do not use discontinuous lining.  
The joint width may vary due to size tolerances of the combinations and of the worktop cut-out.

Characteristics
Product name/family
Vario/Domino gas hob
Built-in / Free-standing
Built-in
Energy input
Gas
Total number of positions that can be used at the same time
1
Required niche size for installation (HxWxD)
134 x 360 x 492
Width of the appliance
380
Dimensions
134 x 380 x 520
Dimensions of the packed product (HxWxD)
300 x 500 x 600
Net weight
15.354
Gross weight
17.4
Residual heat indicator
Location of control panel
External control
Basic surface material
brushed stainless steel
Color of surface
Stainless steel, Stainless steel
Color of frame
Stainless steel, Stainless steel
Approval certificates
CE, Eurasian, G-Mark, VDE
Length electrical supply cord
140
Connection rating
15
Gas connection rating
5800
Fuse protection
2
Voltage
220-240
Frequency
50; 60

**Consumption and connection features**


**2021-12-14**  
**Page 1**

If installing several appliances in individual cut-outs allow for a division bar of minimum 50 mm between the individual cut-outs.  
Special nozzles can be ordered as spare parts.  
Plan for an electrical connection (the appliance is not operable without power supply).  
Air intake from above.  
No intermediate shelf required.  
Rear panel and wall trims must be heat-resistant and consist of a non-flammable material.  
A minimum clearance of at least 150 mm from adjacent heat-sensitive furniture or contact surfaces must be observed or thermal insulation fitted.  
If operated next to the downdraft ventilation VL 414, the ventilation moulding AA 414 is recommended to ensure maximum performance of the cooktop.  
With a total connected load of more than 11 kW local regulations concerning room ventilation, room size and combination of extraction or recirculation hoods must be observed.  
Minimum clearance between gas cooktop(s) with more than 11 kW and ventilation hood 70 cm.  
Appliance can be snapped into the worktop from above.  
Appliance weight: approx. 15 kg.

**Connection**


Total connected load gas 5.8 KW.  
Total connected load electric 15 W.  
Connecting cable 1.4 m with plug.

#### Installation of the control knob; flush installation

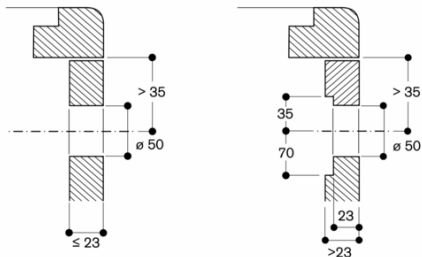


measurements in mm

#### Installation of the control knob; surface mounting

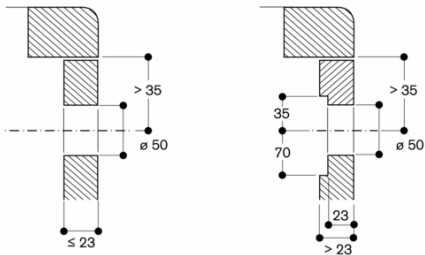


measurements in mm

#### Installation with appliance cover, surface mounting

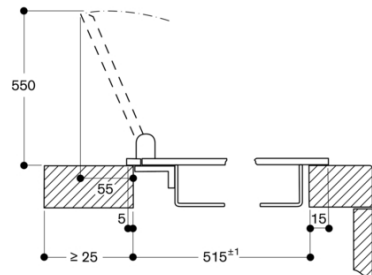


measurements in mm

#### Installation with appliance cover, flush mounting

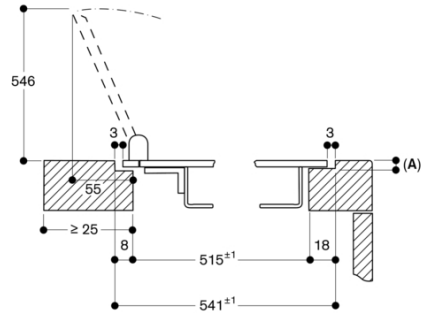

A:  $3.5^{+0.5}_{-0}$


measurements in mm

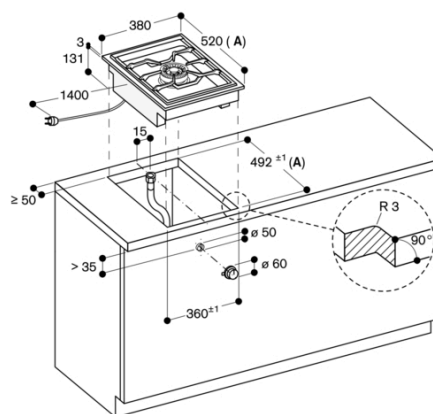

A: When installing with appliance cover, take the deeper cut-out into consideration (observe separate planning notes)

measurements in mm

#### Longitudinal section

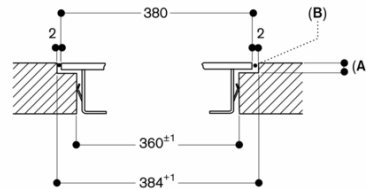


A:  $3.5^{+0.5}_{-0}$

6.5<sup>+0.5</sup> in combinations with frameless induction hobs

B: Fill with silicone

measurements in mm


#### View from above



A: When installing with appliance cover, take the deeper cut-out into consideration (observe separate planning notes)

measurements in mm

#### Cross-section

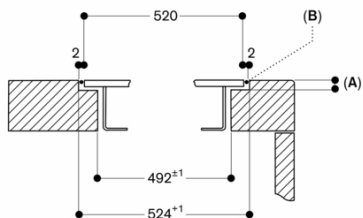


A: 3.5<sup>-0.5</sup>  
6.5<sup>+0.5</sup> in combinations with frameless induction hobs  
B: Fill with silicone


When installing with appliance cover, pay attention to the deeper cut-out and the front and rear groove width.

measurements in mm

#### Installation with appliance cover, flush mounting

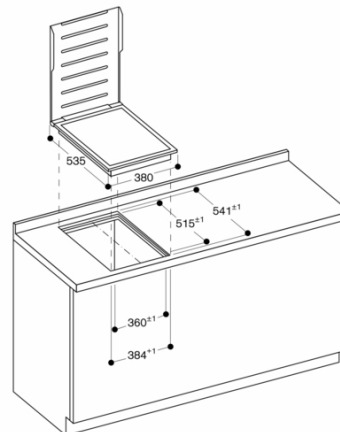

measurements in mm

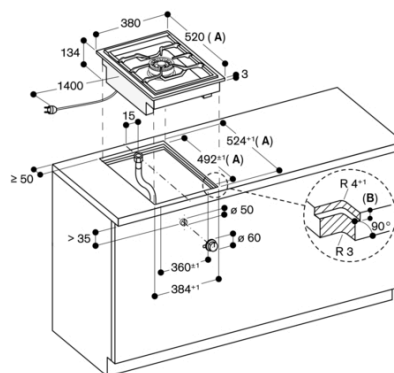


A: When installing with appliance cover consider the deeper cut-out (observe separate planning notes)

B: 3.5<sup>+0.5</sup> mm  
6.5<sup>+0.5</sup> mm in combinations with frameless induction cooktops

Measurements in mm

#### Installation with appliance cover, surface mounting

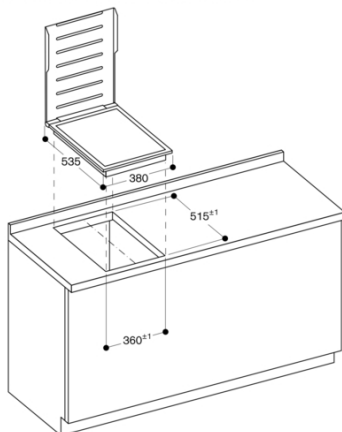

measurements in mm