



Color Variants

VP414111
Stainless steel
Width 38 cm

Included accessories
2 x spatula.

Installation Accessories
VA420004
Connection strip for combination with other Vario appliances of the 400 series for flush mounting
VA420010
Connection strip for combination with other Vario appliances of the 400 series for surface mounting
VA440010
Stainless steel appliance cover with mounting strip

VP414111
Vario Teppan Yaki 400 series
Stainless steel
Width 38 cm

Cooking directly on the hard-chromed metal surface, without any pots or pans
Exact temperature control up to 240 °C
Optimum heat distribution
Solid stainless steel control knob
Precision crafted 3 mm stainless steel
For surface mounting with a visible edge or for flush mounting
Can be combined perfectly with other Vario appliances of the 400 series

Cooking zones
Usable area W 31 x D 44 cm.

Handling
Control knobs with illuminated ring, cooking zone and temperature markings.
Electronic temperature control from 120 °C to 240 °C.

Features
Two zones, each 1500 W, can be operated together as a complete surface or each halve separately.
Keeping warm setting.
Cleaning stage.
Even with traces of use, always easy to clean like a cast pan.


Safety
Safety shut-off.
Pre-heat and residual heat indicator.

Planning notes
Depending on the type of installation (surface-mounted or flush-mounted, with or without an appliance cover), the specific location of the cut-out and the knob positions may vary.
If combining several Vario appliances of the 400 series, a connection strip VA 420 must be placed between the appliances. Depending on the type of installation, the corresponding connection strip must be provided. The bearing capacity and stability, in the case of thinner worktops in particular, must be supported using suitable substructures. Take into account the appliance weight and additional loads.
Additional instructions for flush mounting:
Installation is possible in worktops made of stone, synthetics or solid wood. Heat resistance and watertight sealing of the cut edges must be observed. Concerning other materials please consult the worktop manufacturer.
The groove must be continuous and even, so that uniform placing of the appliance on the gasket is ensured. Do not use discontinuous lining.
The joint width may vary due to size tolerances of the combinations and of the worktop cut-out.
If installing several appliances in individual cut-outs allow for a division bar of minimum 50 mm between the individual cut-outs.
A minimum lateral clearance of at least 40 mm from adjacent heat-sensitive furniture or contact surfaces must be observed or thermal insulation fitted.
Appliance can be snapped into the worktop from above.
Appliance weight: approx. 12 kg.

Connection
Total connected load 3.0 KW.
Connecting cable 1.5 m without plug.


Characteristics
Product name/family
Vario/Domino Teppan Yaki
Built-in / Free-standing
Built-in
Energy input
Electric
Type of control
Electronic
Grill grating material
Required niche size for installation (HxWxD)
118 x 360 x 490
Width of the appliance
380
Dimensions
118 x 380 x 520
Dimensions of the packed product (HxWxD)
400 x 460 x 600
Net weight
12.274
Gross weight
16.1
Residual heat indicator
Separate
Location of control panel
Hob front
Basic surface material
Color of surface
Stainless steel, Stainless steel
Color of frame
Stainless steel
Approval certificates
Australia Standards, CCC, CE, China, China ROHS 20, Eurasian, G-Mark, Ukraine, VDE
Length electrical supply cord
150
Connection rating
3000
Gas connection rating
Fuse protection
16
Voltage
220-240
Frequency
50-60

Consumption and connection features
2021-12-17
Page 1

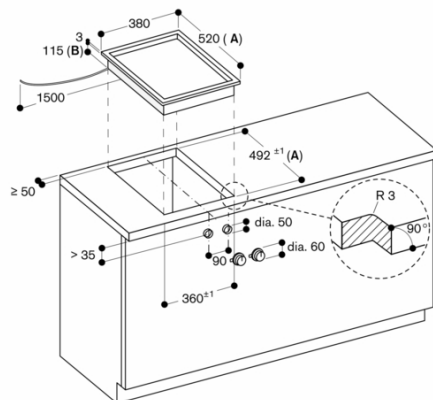

A: When installing with appliance cover, take the deeper cut-out into consideration (observe separate planning notes)
B: 130 mm in the area of the cable clamp (left, on the rear side)


measurements in mm

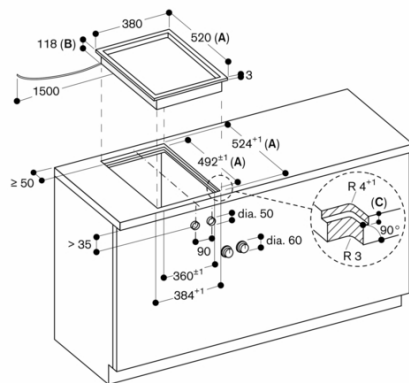

A: When installing with appliance cover, take the deeper cut-out into consideration (observe separate planning notes)
B: 133 mm in the area of the cable clamp (left, on the rear side)
C: 3.5^{+0.5}
 6.5^{+0.5} in combinations with frameless induction hobs


measurements in mm

Installation of the control knob; flush installation

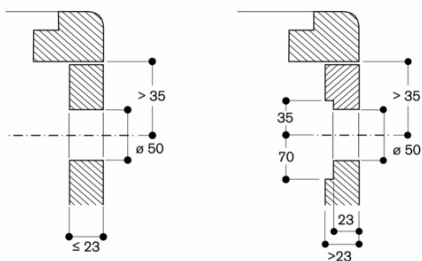


measurements in mm

Installation of the control knob; surface mounting

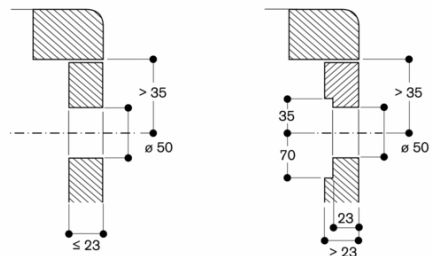


measurements in mm

Installation with appliance cover, surface mounting

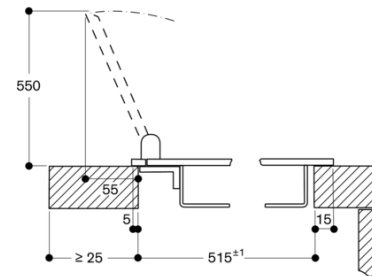

measurements in mm


Installation with appliance cover, flush mounting

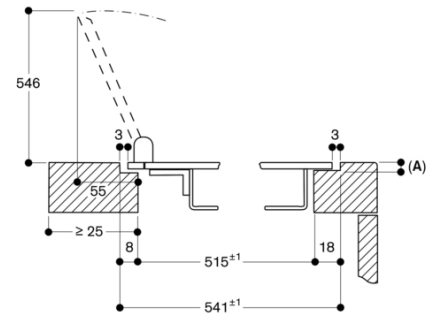

A: $3.5^{-0.5}$

measurements in mm


Longitudinal section

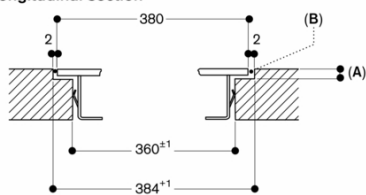

- A: $3.5_{-0.5}^{+0.5}$ in combinations with frameless induction hobs
B: Fill with silicone

measurements in mm


View from above



- A: When installing with appliance cover, take the deeper cut-out into consideration (observe separate planning notes)

measurements in mm

Cross-section

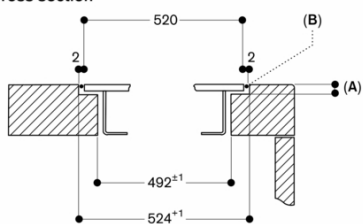


- A: $3.5_{-0.5}^{+0.5}$ in combinations with frameless induction hobs
B: Fill with silicone

When installing with appliance cover, pay attention to the deeper cut-out and the front and rear groove width.


measurements in mm

Installation with appliance cover, surface mounting

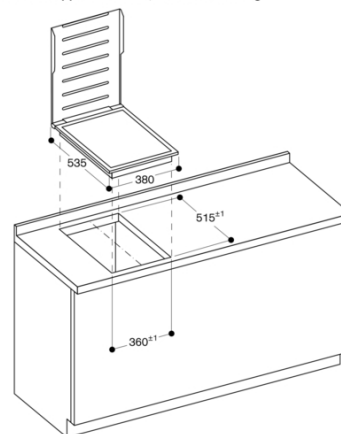

measurements in mm

Installation with appliance cover, flush mounting

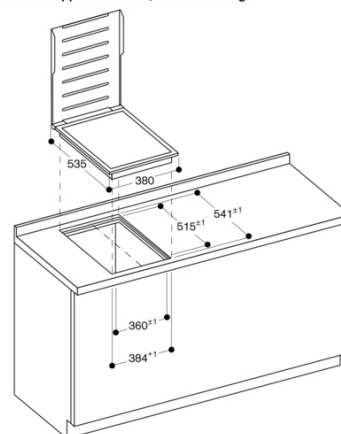

measurements in mm